



## Overhead Hoist Crane 2 Ch Single Speed Radio Remote Control Multi voltage 110~380V

### Key features

- Dual Channel Operation: Control two different hoist functions simultaneously for enhanced versatility.
- Single-Speed Control: Simplified operation for consistent lifting speeds, ideal for various tasks.
- Multi-Voltage Compatibility: Supports a voltage range of 110V to 380V for broad applicability across different systems.
- 3 Year Warranty, Customer Support and Service in the USA

### Overhead Hoist Crane Description


The Overhead Hoist Crane Radio Remote Control is a reliable and efficient device designed for operating hoisting equipment with ease. Featuring 2 channels and single-speed control, this remote allows for straightforward handling of loads in various industrial settings. With a multi-voltage capability ranging from 110V to 380V, it is compatible with a wide array of hoist systems, ensuring safety and operational efficiency.

## Technical Specifications

<b>FCC ID</b>	OFNF21	<b>Transmitter Power</b>	≤10dBm
<b>Transmitter Power Supply</b>	2 AA batteries	<b>Wireless Frequency Range</b>	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz
<b>Material</b>	Glass-Fiber PA	<b>IEC Motor Protection</b>	IP65
<b>Control Distance</b>	Approx 60m (100 meters is customized)	<b>Operating Temperature Range</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Safety Code</b>	32 bits (4.3 billion)	<b>Warranty</b>	3 Year

## F21-2S/2D TRANSMITTER

Small, economical, convenient

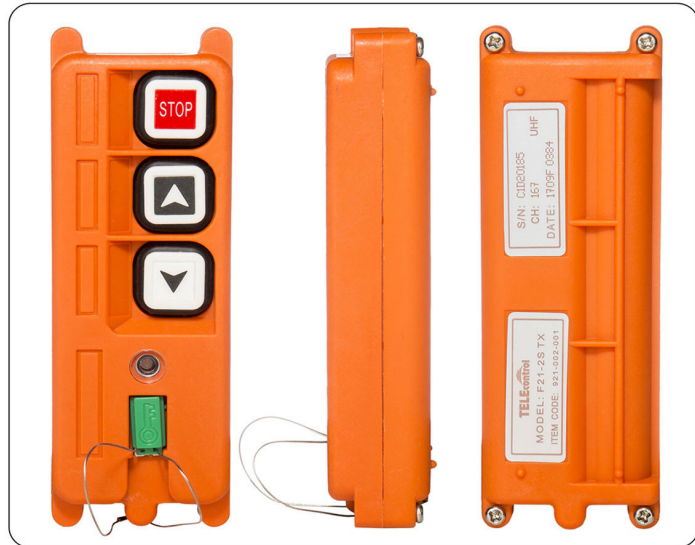

**MODEL:** F21-2S-TX  
**ITEM CODE:** 921-002-001  
**Dimensions:** 132 x 45 x 28 mm  
**Weight:** 98g (without batteries)

**Product Features:**

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

**Standard Configuration:**

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

**Safety features:**

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificates.



### Unit Weight & Dimensions

**Total Unit Weight** 2 lbs / 1 Kg

### Packaging Weight & Dimensions

**Package 1 Net Weight** 2 lbs / 1 Kg

**Package 1 Width** 7 in / 17.78 cm

**Package 1 Gross Weight** 2 lbs / 1 Kg

**Package 1 Height** 3 in / 7.62 cm

**Package 1 Length** 9 in / 22.86 cm