



Optidrive P2 VFD 4KW 5HP, 9.5 A, 380~480 V, 3PH with EMC Filter and TFT Display

Key features


- Power Rating: 4 kW (5 HP) for robust motor performance
- Output Current: 9.5 A, accommodating diverse motor applications
- Input Voltage Range: Operates on 380-480 V three-phase power

Optidrive P2 VFD 4KW 5HP Description

The Optidrive P2 Variable Frequency Drive (VFD) is designed for high-performance motor control in various industrial applications. With a power rating of 4 kW (5 HP) and an output current of 9.5 A, this drive is suitable for 380-480 V three-phase systems. It includes an integrated EMC filter to ensure compliance with electromagnetic compatibility standards and features a TFT display for intuitive monitoring and configuration.

Technical Specifications

Voltage 3 Phase 380/440~480V 50/60Hz

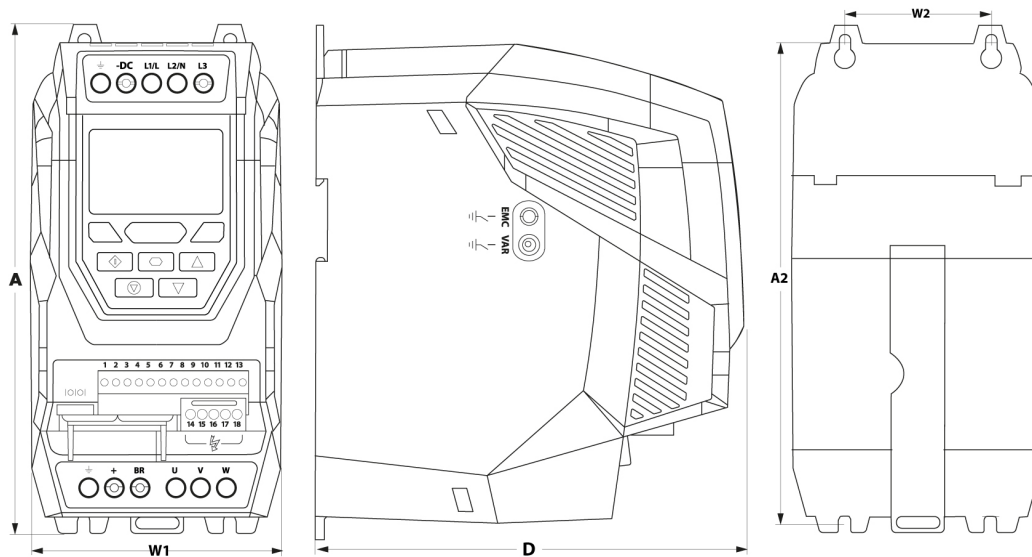

Unit Weight & Dimensions

Total Unit Weight 3.97 lbs / 2 Kg

Packaging Weight & Dimensions

Package 1 Net Weight 3.97 lbs / 2 Kg

Package 1 Width 5.71 in / 14.5 cm

Package 1 Gross Weight 4.19 lbs / 2 Kg

Package 1 Height 10.43 in / 26.49 cm

Package 1 Length 9.06 in / 23.01 cm