




Optidrive P2 VFD 50 HP, 72 A, 380~480 V, 3PH with EMC Filter and TFT D

Input Ratings Supply Voltage 380-480 V Input Phases 3 Supply Current Continuous 76.4 A Supply Fuse or MCB (Type B) 100 A Output Ratings Motor Output Rating 37 kW (50 HP) Output Voltage 0 - Supply Voltage Output Current 72 A Cable Information Max Supply Cable Size 35 mm² (0.05 sq in) Max Motor Cable Size 35 mm² (0.05 sq in) Max Motor Cable Length 100 m (328 ft) Factory Build Options EMC Filter Internal EMC Brake Transistor Internal Enclosure IP20 Display TFT Display PCB Coating Standard

Technical Specifications

Input Phases	3	Output Current	72 A
Supply Voltage	380 - 480 V	Max Supply Cable Size	0.05 sq in
Supply Current	76.4VDC	Max Motor Cable Size	0.05 sq in
Supply Fuse or MCB	Type B 100A	Max Motor Cable Length	328 ft
Motor Output Rating	37kW		

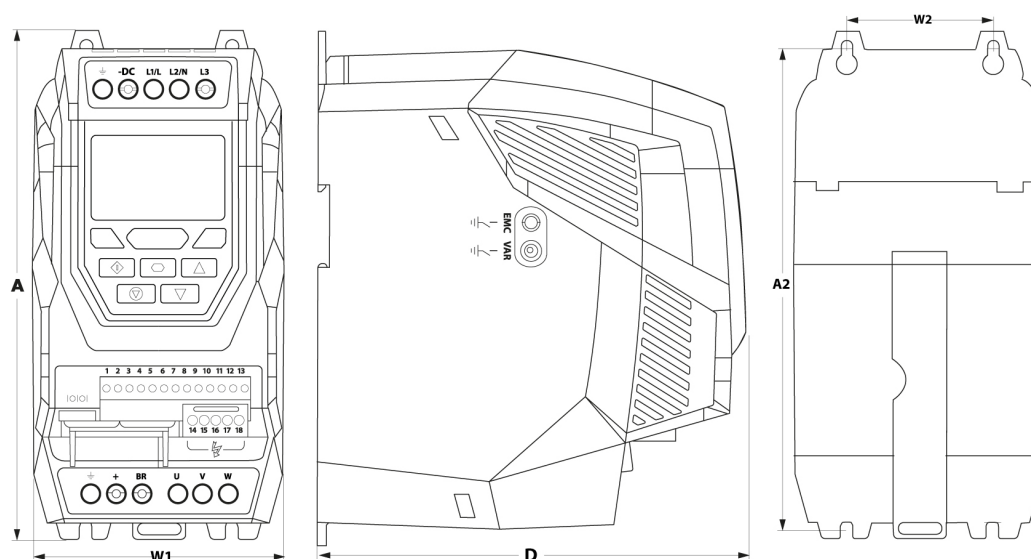

Unit Weight & Dimensions

Total Unit Weight	3.97 lbs / 2 Kg
-------------------	-----------------

Packaging Weight & Dimensions

Package 1 Net Weight	3.97 lbs / 2 Kg
Package 1 Width	6 in / 15.24 cm
Package 1 Gross Weight	4.19 lbs / 2 Kg
Package 1 Height	11 in / 27.94 cm
Package 1 Length	10 in / 25.4 cm