



440 lb 12V Electric Rope Hoist 9/19 ft. H1 Duty

Key features


- Load Capacity: 440 lbs, ideal for lighter lifting tasks.
- Voltage: 12V, suitable for battery-powered or vehicle applications.
- Lifting Height: 9 ft (standard) / 19 ft (extended), offering versatility for different lifting needs.
- 1 Year Warranty, Customer Support and Service in the USA

Electric Wire Rope Hoist Description

440/880 lb Wireless Electric Wire Rope Hoists are used for raising and lowering material. Power Cord is standard at 3 ft. for Hook and Push Trolley Mounts. Hoists usually ship within 1-3 business days after ordering. Please call us at 1 (800) 971-8061 for any special requests. The Highest Quality, most Technologically Advanced Hoist in the Industry. Our hoist ranges from basic Light Duty H1 to Heavy Duty Motor - 60 minute, H4 classification, Class B insulation with cooling fins and standard thermal motor protection. Compact lightweight body offers one of the lowest headroom hoists in the industry. Extremely durable and reliable Pull Rotor Motor Brake. Contains NO brake coil to fail like conventional disc brakes. Easy Maintenance Control Panel is hinged to swing out to provide fast, easy, and trouble-free access. Completely Sealed Body suitable for both indoor and outdoor applications, including harsh environments. Gaskets throughout the hoist provide an IP54 rating. Oil Bath and precision machined helical and spur gears provide for quiet, smooth, and cool operations.

Technical Specifications

Rated Load Capacity	440/880 lb 200/400 kg	Insulation Grade	B
Standard Lifting Height	19.6ft / 6m @1line 9.8ft / 3m	IEC Motor Protection	IP40
Speed (f/m) / min	6~13 ft 2~4 m	Control	Pendant Control and Optional Wireless F21
Number of Speeds	1 Speed	Control Voltage	12 V
Voltage	Battery Power 12 VDC	Humidity	<85%
Duty Class	H1/M2/1Cm/Class A	Temperature	-4°~104° F / -20°~40° C
Motor Type (68)	Squirrel Cage Induction Motor	Noise Level	71 dB
Motor Power (6)	400W	Standards Compliance	Intertek 4006091 , UL N 1340, CAN/CSA C22.2 , EN14492-2 , EN60204-32
Motor Brake	YES	Warranty	1 Year

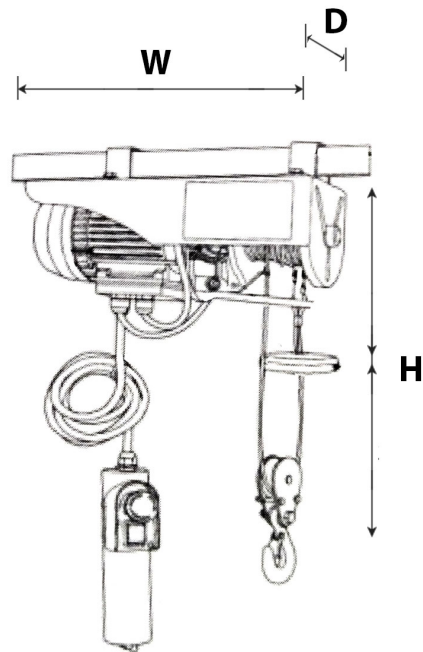

Unit Weight & Dimensions

H Minimum Headroom	13.7 in
W Width	13.3 in
D Depth	4.7 cm