



## Hand Chain Hoist Explosion Proof w/ spark resistant features 5 ton ATEX made in Japan

### Key features

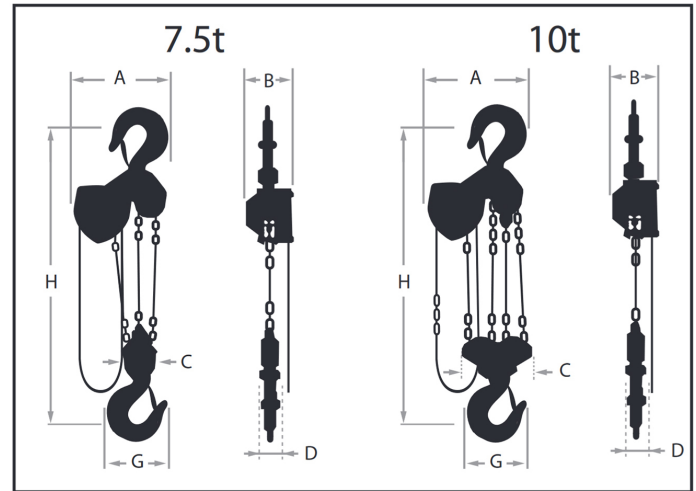
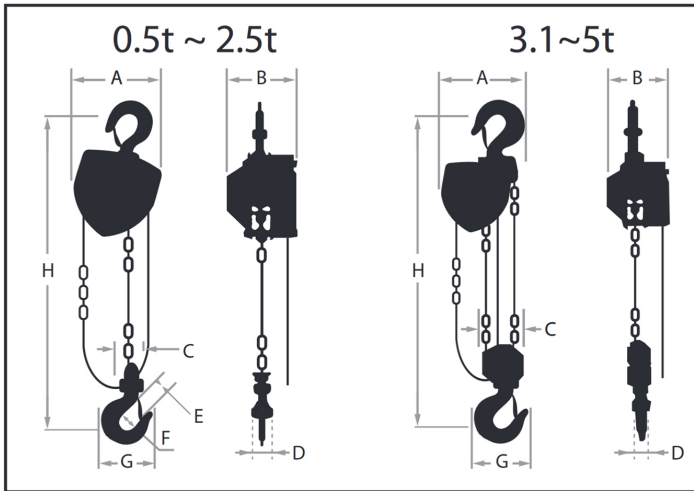
- Capacity: Lifts up to 5 tons (10,000 lbs), suitable for heavy lifting tasks.
- Spark Resistant Features: Engineered to prevent sparks, enhancing safety in explosive settings.
- Explosion Proof Design: Certified for safe use in hazardous environments, ensuring compliance with strict safety regulations.
- 3 Year Warranty, Customer Support and Service in the USA

### Explosion Proof Description

The Hand Chain Hoist with Explosion Proof and Spark Resistant features is designed for heavy-duty lifting in hazardous environments. With a capacity of 5 tons, this hoist meets ATEX standards, making it ideal for use in explosive atmospheres. Manufactured in Japan, it offers exceptional durability and reliability for industrial applications.

## Technical Specifications

<b>Rated Load Capacity</b>	5 Ton / 11000 lbs	<b>Chain Falls</b>	2
<b>Load Test</b>	125% [Rated Load / Capacidad Nominal]	<b>Chain Length</b>	40 ft / 12 m
<b>Standard Lifting Height</b>	20 ft / 6 m	<b>Hand Chain Height (Customizable)</b>	20 ft / 6 m
<b>Explosion Proof Protection</b>	Ex II 2 GD c II B T105 °C	<b>Standards Compliance</b>	ASME B30.16 / B30.17 / ATEX Directive
<b>Motor Type (68)</b>	Manually Operated	<b>Made in</b>	Japan
<b>Control</b>	Hand Chain	<b>Warranty</b>	3 Year
<b>Load Chain Size</b>	9 x 27 mm		


**SPECIFICATIONS - PWEX H100 SPARK RESISTANT SERIES, HOOK MOUNT**

Model	Max working load (lbs)	Max working load (mt)	Standard Lift (ft)	Manufacturer's Test Load	Headroom (in) "H"	Headroom (in) Lug Mount to Trolley	Hand Effort to Lift Full Working Load (lbf)	Load Chain		Hand Chain	Net Weight (lbs)
								Dia. X Pitch (mm)	No. of Falls	Dia. X Pitch (mm)	
PWEX-H100-05	1100	0.5	10	150% x Max. working load	10.83	11.7	59.5	5 x 15	1	5 x 23.5	22
PWEX-H100-1	2200	1.0	10		11.81	12.5	69.5	6.3 x 19			27
PWEX-H100-2	4400	2.0	10		14.77	15.8	88.2	8 x 24			46
PWEX-H100-3	6800	3.1	10		20.87	20.5	104.7	7.1 x 21			53
PWEX-H100-5	11000	5.0	10	125% x Max. working load	24.1	24.8	105.8	9 x 27	2	5 x 23.5	87
PWEX-H100-10	22000	10.0	10		30.52	31.4	115.7	9 x 27			4

**DIMENSIONS (IN.) - PWEX H100 SPARK RESISTANT SERIES, HOOK MOUNT**

Capacity (lbs)	A	B	C	D	E	F	G	H
1100	5.5	6.1	2.3	1.3	1.1	1.4	2.7	10.83
2200	6.3	6.3	2.5	1.4	1.2	1.7	3.5	11.81
4400	8.5	7.2	2.6	1.6	1.5	2.1	4.5	14.77
6800	9.1	6.6	4.4	2.5	1.8	2.4	5.5	20.87
11000	11.1	7.5	6.6	3.1	2.1	2.8	6.4	24.61
22000	15.2	7.5	11.8	3.9	2.8	3.4	9	30.52

<b>H Minimum Headroom</b>	612 mm [24.10 in]	<b>Hand Chain Size</b>	5 x 23.5 mm
<b>J Hook Opening</b>	53 mm [2.1 in]		