



1/2 ton 1100 lb 220V 1 Speed Electric Chain Hoist 20 ft. G80 Chain H2 Duty

Key features

- Load Capacity: 1/2 ton (1100 lbs), designed for moderate lifting tasks.
- Voltage: 220V, suitable for higher voltage operations.
- Operation Speed: 1 speed, provides consistent lifting performance.
- 3 Year Warranty, Customer Support and Service in the USA


Electric Chain Hoist Description

This electric chain hoist provides a lifting capacity of 1 ton (2200 lb) and operates on 110V power. It features a 20 ft G80 chain, ensuring strength and durability for heavy-duty tasks. With a single-speed motor and an H2 duty rating, this hoist is designed for efficient and reliable performance in demanding industrial settings. The included wireless control enhances convenience and operational flexibility, allowing you to manage lifting operations from a distance with ease.

Technical Specifications


Rated Load Capacity	1100 lb / 500 kg	Control Voltage	24V
Standard Lifting Height	20 ft / 6 m	Emergency Stop	Yes
Speed (f/m) / min	16 ft / 5 m	Contactors	TECO 12 AMP
Number of Speeds	1 Speed	Load Chain Type	G80
Voltage	1 Phase 220~240V 50/60Hz	Load Chain Size	8x24 mm
Available Voltages	230V 1Φ	Chain Falls	1
Duty Class	H2/M3/1Bm/Class B	Chain Length	20 ft / 6 m
Motor Power (6)	0.65 kW	Humidity	<85%
Motor AMP	4	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor Brake	Yes	Noise Level	70 dB
Insulation Grade	F	Minimum Turn Radius	
IEC Motor Protection	IP54	Standards Compliance	ASME HST-1 , ASME B30.16, EN60204-32
Control	Pendant Control and Optional Wireless	Warranty	3 Year

PWHF500u

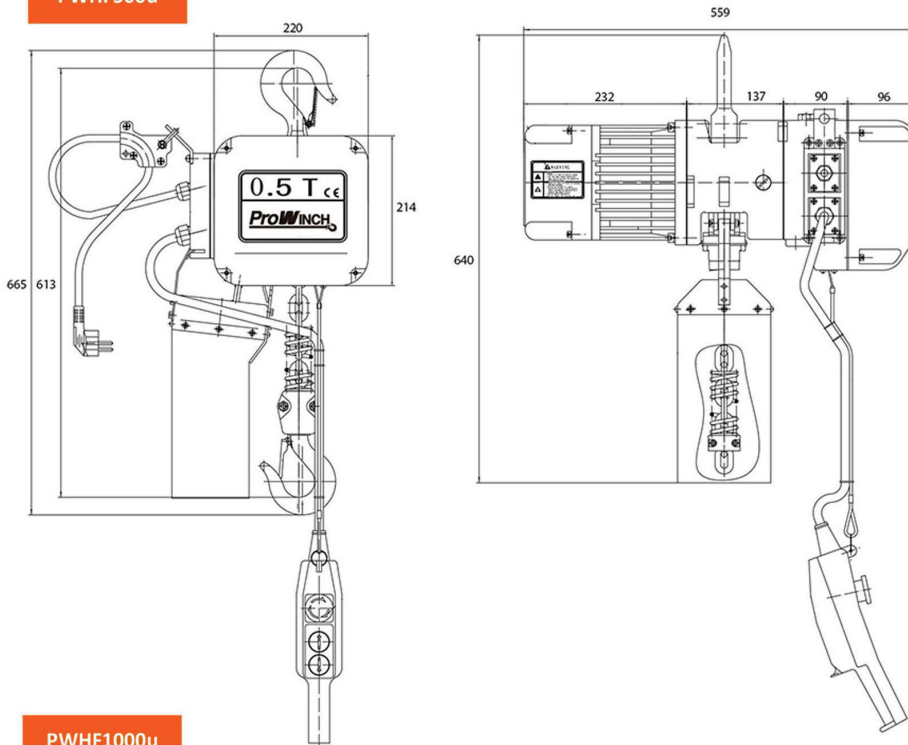

- Light die-casting aluminium housing.
- Electromagnetic Safe Brake holds load with no power.
- Upper and lower limit switches prevent over-travel
- 14ft Pendant Control with Emergency Stop switch
- Overload Protection
- Forged 360° swivel hook

PWHF1000u

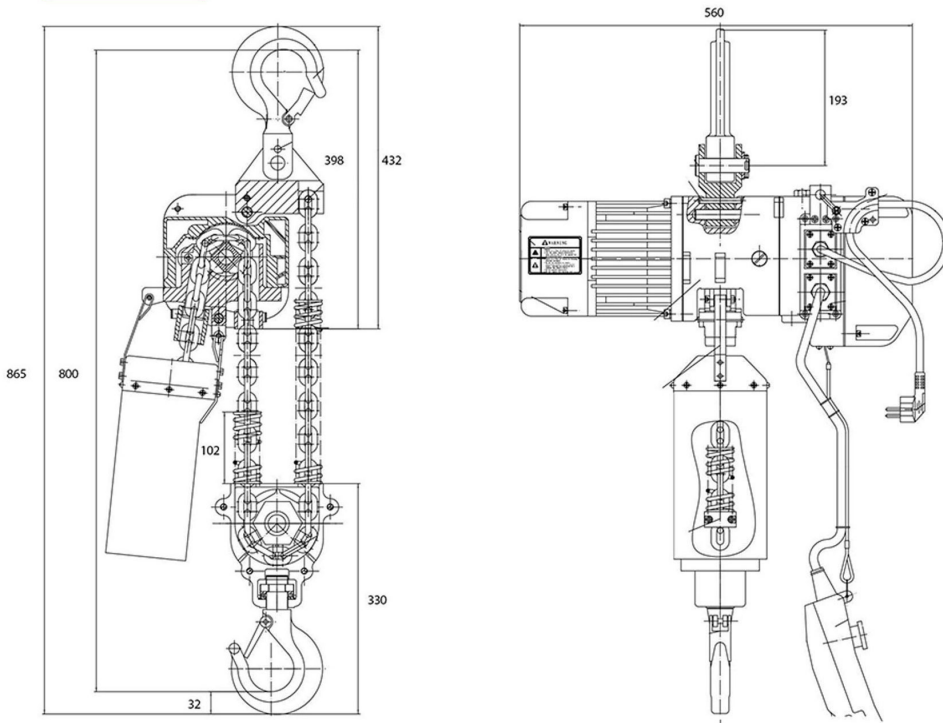

- Carcasa de aluminio fundido a presión.
- Freno de Seguridad Electromagnético que sostiene la carga sin energía. Interruptores de límite Superior e Inferior para prevenir sobrecarrera.
- Botonera de control con 4 metros e interruptor de parada de emergencia.
- Protección de sobre carga.
- Gancho Forjado de giro libre 360

Unit Weight & Dimensions

H Minimum Headroom	24 in / 613 mm
D Depth	300 mm
A Total Height	665 mm
W Width	22 in / 559 mm
Total Unit Weight	103 lbs / 47 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	103 lbs / 47 Kg
Package 1 Width	14 in / 35.56 cm
Package 1 Gross Weight	119 lbs / 54 Kg
Package 1 Height	25 in / 63.5 cm
Package 1 Length	21 in / 53.34 cm