



1200 lb 220V Portable Electric Wire Rope Hoist H1 Duty

Key features


- Load Capacity: 1200 lbs, suitable for medium-duty lifting tasks.
- Voltage: 220V, designed for standard electrical systems.
- Duty Rating: H1 Duty, indicating it's built for occasional use with moderate load cycles.
- 1 Year Warranty, Customer Support and Service in the USA

Electric Wire Rope Hoist Description

600 kg Wireless Electric Wire Rope Hoists are used for raising and lowering material. Power Cord is standard at 3 ft. for Hook and Push Trolley Mounts. Hoists usually ship within 1-3 business days after ordering. Please call us at 1 (800) 971-8061 for any special requests. The Highest Quality, most Technologically Advanced Hoist in the Industry. Our hoist ranges from basic Light Duty H1 to Heavy Duty Motor - 60 minute, H4 classification, Class B insulation with cooling fins and standard thermal motor protection. Compact lightweight body offers one of the lowest headroom hoists in the industry. Extremely durable and reliable Pull Rotor Motor Brake. Contains NO brake coil to fail like conventional disc brakes. Durable Push-Button Pendant for easy, one-handed operation. Includes strain relief wire molded to pendant cord for added support and reliability. Easy Maintenance Control Panel is hinged to swing out to provide fast, easy, and trouble-free access. Completely Sealed Body suitable for both indoor and outdoor applications, including harsh environments. Gaskets throughout the hoist provide an IP54 rating. Oil Bath and precision machined helical and spur gears provide for quiet, smooth, and cool operations. Superior Quality Wire Rope is precision gauged, Grade 80, manganese alloy load Wire Rope that is heat treated for wear resistance and extended life.

Technical Specifications

Rated Load Capacity	1200 lb-600kg @ 2 lines 600 lb-300 kg @ 1 line	Insulation Grade	B
Standard Lifting Height	40ft single line / 20ft double line (12m / 6m)	IEC Motor Protection	IP54
Speed (f/m) / min	4m/min 8m/min	Control	Pendant Control and Optional Wireless F21
Number of Speeds	1 Speed	Emergency Stop	YES
Voltage	1 Phase 220~240V 50/60Hz	Wire Rope	ø3/16 in ø4.5 mm
Duty Class	H1/M2/1Cm/Class A	Humidity	<85%
Motor Type (68)	Squirrel Cage Induction Motor	Temperature	-4°~104° F / -20°~40° C
Motor Power (6)	1050 W	Noise Level	71 dB
Motor Brake	YES	Warranty	1 Year

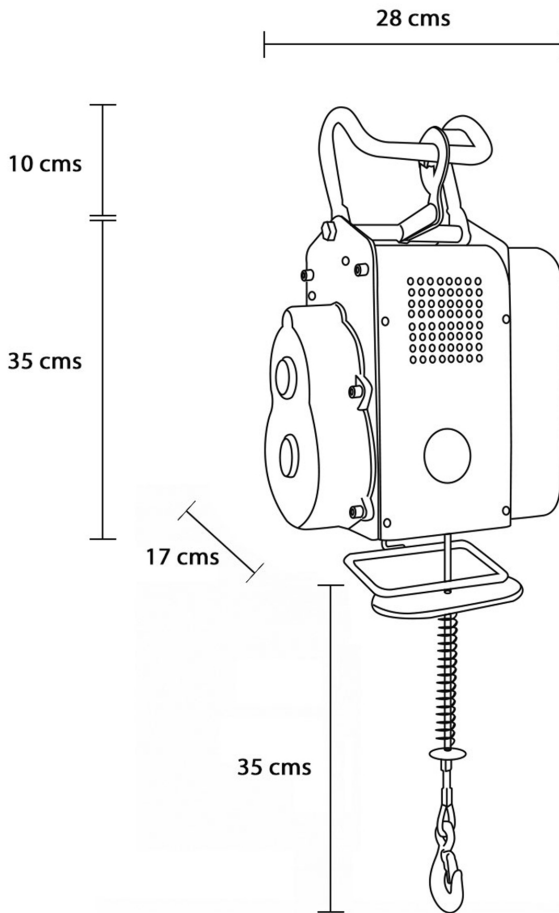

PWHH600A

Lifting Capacity	1200 lb-600kg @ 2 lines 600 lb-300 kg @ 1 line*
Capacidad Elevación	
Voltage	220 V 50 HZ
Voltaje	
Current	4,6 A
Corriente	
Chain Diameter	4,5 mm
Diámetro Cadena	
Group of mechanisms	M1
Grupo de mecanismos	
Protecting Grade	IP54
Grado Protección	
Lifting Height	33 ft-10 m 66 ft-20 m*
Altura Elevación	
Lifting Speed	4m/min 8m/min*
Velocidad Elevación	
Insulating grade	B
Grado Aislación	
Speed Ratio	124: 1
Relación Velocidad	
Input Power	1050 W
Entrada de Energía	
Work Rate	S3 -20% -10 min
Tasa de Trabajo	
Rope tensile strenght	≥1770 N/mm ²
Fuerza de tracción de la cuerda	

Unit Weight & Dimensions

D Depth	7 in / 178 mm
W Width	11 in / 280 mm