



1/2 Ton Electric Chain Hoist 20 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

The **Wireless 1 Speed Prowinch 1/2 ton Electric Chain Hoist** allows you to easily lift loads with a powerful motor. The three-phase connection makes this chain hoist perfect for use in a wide variety of situations and environments. The quick-connect wiring system allows you get set up and started on your project in no time at all.

Technical Specifications

Rated Load Capacity	1100 lbs / 500 kg	Emergency Stop	Yes
Standard Lifting Height	20 ft / 6 m	Load Chain Type	G80 JAPAN
Number of Speeds	1 Speed	Load Chain Size	6.3x19mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Falls	1
FCC ID	2AZMK-Q1212	Chain Length	20 ft / 6 m
Duty Class	H4/M5/2m/Class D	Humidity	<85%
Motor/Engine Power	0.9 KW	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor Brake	Yes	Noise Level	81 dB
Insulation Grade	F	Standards Compliance	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
IEC Motor Protection	IP55	UL File	MSXT.E528915 - Hoists
Control	Wireless F21-4 and Pendant Control	Warranty	3 Year
Control Voltage	12V		

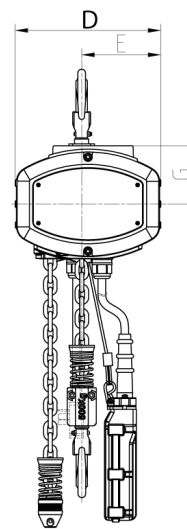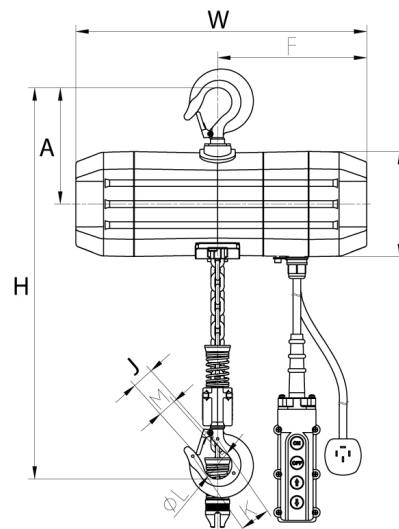

Unit Weight & Dimensions

W Width	18.1 in / 45.8 cm	Package 1 Net Weight	93 lbs / 42 Kg
J Hook Opening	1.46 in / 3.7 cm	Package 1 Width	19 in / 48.26 cm
Total Unit Weight	93 lbs / 43 Kg	Package 1 Gross Weight	123 lbs / 56 Kg
		Package 1 Height	18 in / 45.72 cm
		Package 1 Length	24 in / 60.96 cm

Packaging Weight & Dimensions