



## 660 lbs Electric Compact Industrial Winch Wire Rope 110/120V Single Phase

### Key features

- Sturdy 600lb 1st Layer Load Capacity.
- Convenient wired remote control.
- Low noise, high driving efficiency and good performance
- Equipped with an electromagnetic brake.
- 1 Year Warranty, Customer Support and Service in the USA

### Compact Winch Description

The **Prowinch 660 lbs compact winch** is a dependable solution for a wide variety of industries. There are a variety of optional add-ons available for a more customized experience. This winch is an excellent choice for a variety of industries such as ATV recovery, logging, and manufacturing.

## Technical Specifications

<b>1st Layer Rated Capacity</b>	661 lb / 300 kg	<b>Dynamic Brake</b>	NO
<b>Speed /min</b>	36~49 ft / 11~15 m	<b>Control</b>	Wired remote control
<b>Number of Speeds</b>	1 Speed	<b>Control Voltage</b>	110V
<b>Voltage</b>	1 Phase 110~120V 60Hz	<b>Transmission / Reducer Type</b>	Planetary Reducer
<b>Duty Class</b>	H2/M3/1Bm/Class B	<b>Reducer Brake</b>	Electromagnetic
<b>Motor/Engine Type</b>	Electric AC	<b>Drum Brake</b>	NO
<b>Motor/Engine Power</b>	1.1 KW	<b>Wire Rope</b>	ø7 x 98 ft / ø7 x 30 m (drum cable capacity)
<b>Motor Brake</b>	NO	<b>Standards Compliance</b>	ASME B30.7
<b>Insulation Grade</b>	B	<b>Warranty</b>	1 Year
<b>IEC Motor Protection</b>	IP55		

RR-W-410E 7 /6x19/6x26 EIPS Fiber Core/ Alma de Fibra

**Rope Diameter / Diámetro del Cable:** 1/4 in | 6.3 mm

**Nominal Strength / Resistencia Nominal:** 6019 lb / 2730 kg


**Rope Weight x ft / Peso del cable x m:** 0.10 lb / 0.1 kg

INCLUDED / INCLUIDO

Layer / Capa	Rope on drum / Mts x Capa	Lifting x layer / Cap x Capa	Speed / Velocidad (per min)
1	21 ft / 7 m	661 lb / 300 kg	38.3 ft / 11.7 m
2	45 ft / 14 m	591 lb / 268 kg	42.8 ft / 13.0 m
3	72 ft / 22 m	535 lb / 243 kg	47.3 ft / 14.4 m
4	101 ft / 31 m	488 lb / 221 kg	51.8 ft / 15.8 m



Service/Servicio	Load/Carga	Time/Tiempo	Maintenance/ Mantenimiento
Normal	< 65%	< 25%	6~12 (months/meses)
Heavy/Pesado	> 65%	> 25%	3~6 (months/meses)
Severe/Severo	<b>Abnormal Conditions</b> En Condiciones Anormales <b>Environmental, Geographical &amp; Risky</b> Ambientales, Geograficas & Riesgosas		1~3
	<100%	<Duty cycle limit <Limite ciclo de trabajo	

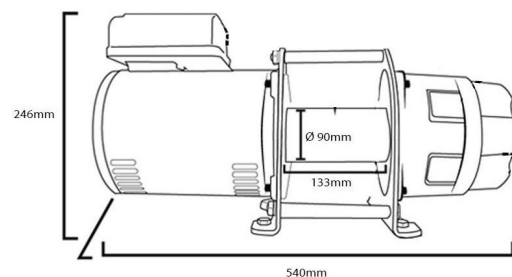

Referential Images  
Specifications may change without notice

## Unit Weight & Dimensions

<b>A Total Height</b>	246 mm	<b>Package 1 Net Weight</b>	108 lbs / 49 Kg
<b>FD Flange Diameter</b>	ø7 mm	<b>Package 1 Width</b>	25 in / 63.5 cm
<b>W Width</b>	540 mm	<b>Package 1 Gross Weight</b>	112 lbs / 51 Kg

## Packaging Weight & Dimensions

<b>DL Drum Length</b>	124 mm	<b>Package 1 Height</b>	12 in / 30.48 cm
<b>BD Barrel Diameter</b>	ø90 mm	<b>Package 1 Length</b>	12 in / 30.48 cm
<b>Total Unit Weight</b>	108 lbs / 50 Kg		