

## 3000 lbs Electric Winch Wire Rope 24V

### Key features

- Maximum Pulling Capacity: 3,000 lbs pulling strength, perfect for light to medium-duty tasks, including vehicle recovery, trailers, and utility tasks.
- 24V DC Power: Powered by a 24-volt system, providing enhanced pulling performance and efficiency for longer winching sessions.
- Wire Rope: Comes with a durable steel wire rope, providing strength and reliability in pulling tasks.
- 1 Year Warranty, Customer Support and Service in the USA

### Winch Description

This Prowinch 3,000 lbs 24V Electric Winch offers powerful performance in a compact size. The winch is IP67 waterproof, which makes it perfect for a wide variety of uses such as off-roading and towing. It is easy to install, which allows you to get set up quickly.

### Prowinch 24V Electric Winch

All of our **AC electric winches** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

### Key Components

All internal components have been upgraded to meet the highest quality standards. Final assembly and all tests are performed locally at Prowinch facility before shipping to ensure that every unit meets the corresponding standard.

### Control System


These winches feature a unique remote control design, which allows the winch to be operated wired or wirelessly.

### Braking System


Automatic brake system designed to automatically engage immediately upon any loss of power.

## Technical Specifications

<b>1st Layer Rated Capacity</b>	3000 lbs	<b>Control Voltage</b>	24 V
<b>Number of Layers</b>	4	<b>Transmission / Reducer Type</b>	3-Stage Planetary
<b>Speed (f/m) / min</b>	6~23 ft / 1.9~7.1 m	<b>Gear Ratio</b>	166:1
<b>Number of Speeds</b>	1 Speed	<b>Drum Brake</b>	Automatic
<b>Voltage</b>	Battery Power 24 VDC	<b>Free Spooling Clutch Type</b>	Cam Activated
<b>FCC ID</b>	2ASYP-DW12K	<b>Wire Rope</b>	Steel $\phi$ 3/16 in x 50 ft   $\phi$ 4.8mm x 15 m
<b>Motor Type (68)</b>	DC Permanent Magnet Motor	<b>Fairlead</b>	Included
<b>Motor AMP</b>	115 AMP	<b>Accessories</b>	Control and Installation Hardware
<b>IEC Motor Protection</b>	IP67	<b>Warranty</b>	1 Year
<b>Control</b>	Wired Remote Control		

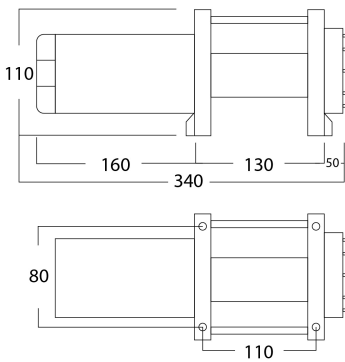

### INCLUDED/ INCLUIDO

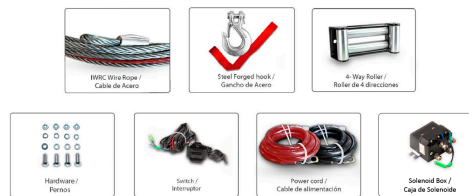

### OPTIONAL / OPCIONAL



Dimensions in mm / Dimensiones en mm

## Unit Weight & Dimensions

<b>A Total Height</b>	114 mm	<b>Package 1 Net Weight</b>	25 lbs / 11 Kg
<b>Drum BD Barrel Diameter (58)</b>	50 mm	<b>Package 1 Width</b>	11 in / 27.94 cm
<b>D Depth</b>	114 mm	<b>Package 1 Gross Weight</b>	26 lbs / 12 Kg
<b>Drum DL Length (56)</b>	74 mm	<b>Package 1 Height</b>	7 in / 17.78 cm
<b>W Width</b>	335 mm	<b>Package 1 Length</b>	15 in / 38.1 cm
<b>Total Unit Weight</b>	25 lbs / 12 Kg		

## Packaging Weight & Dimensions