



6.7 Tons 15000 lbs Air Winch

Key features



- Load Capacity: Capable of lifting or pulling up to 6.7 tons (15,000 lbs), suitable for medium to heavy-duty tasks.
- Air-Powered Operation: Operates using compressed air, making it ideal for environments where electric power is either unavailable or unsafe.
- Durable Construction: Built with high-strength materials to ensure reliability and long-lasting performance under demanding conditions.
- 3 Year Warranty, Customer Support and Service in the USA

Winch Description

This air-powered winch offers a 6.7-ton (15,000 lbs) lifting capacity, designed for reliable and efficient performance in various applications. Powered by compressed air, it provides smooth operation for moderate lifting and pulling tasks, making it ideal for industrial environments where air-driven equipment is preferred.

Technical Specifications

1st Layer Rated Capacity	14660 lb / 6650 kg	Recommended Wire Rope	ø 5/8 in (x 393 ft) / ø 15.8 mm (x 120 m)
Speed (f/m) / min	6~32.8 ft / 0~10 m	Fairlead	Manually Operated
Number of Speeds	Variable Speed	Humidity	≤90%
Control	Lever Throttle / Palanca de Aceleración	Standards Compliance	ASME B30.7/GB/T5359-2010/ANSI/EN 14492-1
Drum Brake	Foot Operated Band Brake	Warranty	3 Year
Free Spooling Clutch Type	Yes		

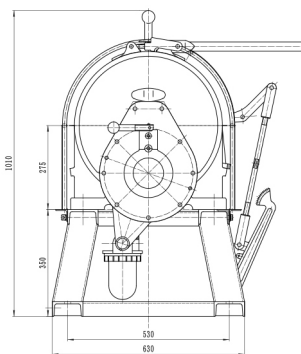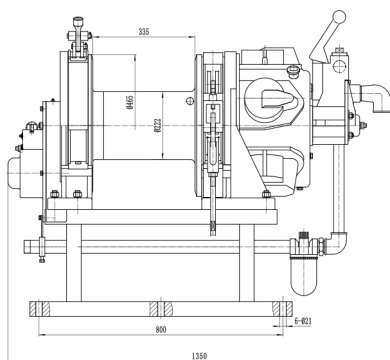

ACCESSORIES INCLUDED ACCESORIOS INCLUIDOS



Lubricator /
Lubricador



Filter /
Filtro



Muffler /
Silenciador

RR-W-410E7

Rope Diameter / Diámetro del Cable: 3/4 in | 19 mm

Nominal Strength / Resistencia Nominal: 58923 lb / 26727 kg

INCLUDED / INCLUIDO	Layer / Capa	Rope on drum / Mts x Capa	Lifting x layer / Cap x Capa	Speed / Velocidad (per min)
	1	114 ft / 35 m	14661 lb / 6650 kg	34 ft / 10.4 m
	2	239 ft / 73 m	13363 lb / 6061 kg	37.3 ft / 11.4 m
	3	376 ft / 115 m	12276 lb / 5568 kg	40.6 ft / 12.4 m
	4	523 ft / 159 m	11352 lb / 5149 kg	43.9 ft / 13.4 m
	5	682 ft / 208 m	10558 lb / 4789 kg	47.2 ft / 14.4 m
	6	851 ft / 259 m	9868 lb / 4476 kg	50.5 ft / 15.4 m
	7	1032 ft / 315 m	9262 lb / 4201 kg	53.8 ft / 16.4 m
	8	1224 ft / 373 m	8726 lb / 3958 kg	57.1 ft / 17.4 m

No.	Product Name / Nombre del Producto	Coating Thickness / Ancho de Capa	Brand / Marca
1	Primer (Barriwe 77 CN)	100 um	JOTUN
2	Intermediate Coat (Penguard Midcoat MIO)	120 um	
3	Top Coat (hardtop XP)	140 um	
4	Total Thickness	360 um	Total thickness no less than 350 um

Unit Weight & Dimensions

A Total Height	1010 mm	Package 1 Net Weight	1852 lbs / 840 Kg
Drum BD Barrel Diameter (58)	222 mm	Package 1 Width	43 in / 109.22 cm
D Depth	630 mm	Package 1 Gross Weight	1984 lbs / 900 Kg
Drum FD Flange Diameter (57)	465 mm	Package 1 Height	43 in / 109.22 cm
W Width	1350 mm	Package 1 Length	748 in / 1899.92 cm

Packaging Weight & Dimensions

Drum DL Length (56)	24 in / 610 mm
Total Unit Weight	1852 lbs / 841 Kg