

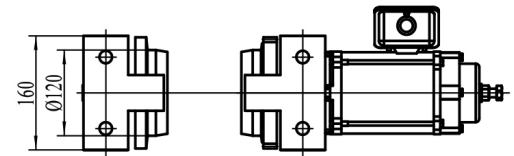


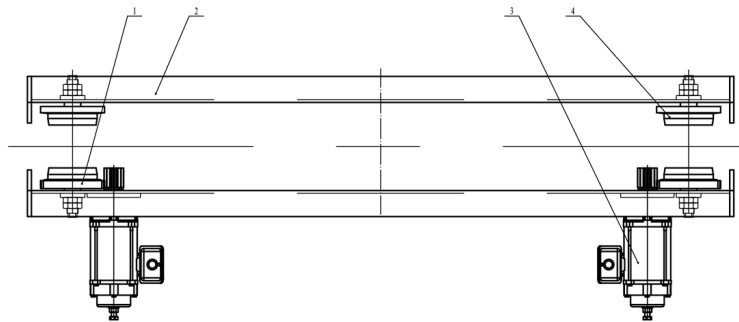

## Technical Specifications

|                            |                                   |                                  |   |
|----------------------------|-----------------------------------|----------------------------------|---|
| <b>Rated Load Capacity</b> | 3 ton                             | <b>Motor Brake</b>               | Yes   |
| <b>Speed (f/m) / min</b>   | 66 ft                             | <b>IEC Motor Protection</b>      | IP54  |
| <b>Number of Speeds</b>    | 1 Speed - Optional Variable Speed | <b>Variable Frequency Driver</b> | Optional 1.5 Kw   |
| <b>Voltage</b>             | 3 Phase 220~240/440~480V 60Hz     | <b>Dynamic Brake</b>             | Only with VFD Optional  |
| <b>Total Power Watts</b>   | 0.25Kw x 4                        | <b>Control</b>                   | Not Included. Optional single Speed, 2 Speed and Variable Speed |
| <b>Max. Span</b>           | 53 ft                             | <b>I-Beam Width Range</b>        | 110 - 300 mm (4.33 - 11.8 in)                                   |
| <b>Material</b>            | Steel                             | <b>Standards Compliance</b>      | ASME / CMAA / Nch   |
| <b>Duty Class</b>          | H4/M5/2m/Class D                  | <b>Warranty</b>                  | 3 Year  |

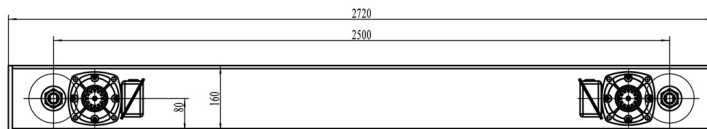

## Unit Weight & Dimensions

|                         |         |
|-------------------------|---------|
| <b>End-Truck Length</b> | 2500 mm |
|-------------------------|---------|

## Packaging Weight & Dimensions

|                               |                   |
|-------------------------------|-------------------|
| <b>Package 1 Gross Weight</b> | 648 lbs / 294 Kg  |
| <b>Package 1 Width</b>        | 16 in / 40.64 cm  |
| <b>Package 1 Length</b>       | 83 in / 210.82 cm |
| <b>Package 1 Height</b>       | 28 in / 71.12 cm  |