



Bridge crane with 3 Tons Hoist

Key features

- Load Capacity: Engineered to lift up to 3 tons, suitable for diverse applications in manufacturing, warehouses, and workshops.
- Top Running Configuration: Allows for smooth movement along the runway, optimizing workflow and minimizing operational delays.
- Durable Construction: Built with high-quality materials to withstand daily use and harsh environments, ensuring long-lasting performance.
- 3 Year Warranty, Customer Support and Service in the USA

The 3 Tons Single Girder Top Running Underhung Hoist Crane Description

The 3 Tons Single Girder Top Running Underhung Hoist Crane is designed for efficient and space-saving lifting in various industrial environments. This crane combines a lightweight design with robust performance, making it ideal for handling loads up to 3 tons effectively.

Technical Specifications


Warranty	3 Year
----------	--------



Model/Modelo	PWMS3T
Capacity Capacidad	6614 lb / 3000 kg
Lifting Height Altura de Izaje	11 ft / 3.37 m
Speed (per min) Velocidad (por min)	13.2 ft / 4.4 m
Traveling Speed (per min) Velocidad Desplazamiento (por min)	36 ft / 11 m
Lifting Motor Motores de Izaje	1-3 kW
Traveling Motor Motores Desplazamiento	0.75 kW
Duty Class Clase de Servicio	M4



Model/Modelo	PVLH3T
Capacity Capacidad	6614 lb / 3000 kg
Length Longitud	20.3 ft / 6.2 m
Traveling Length Distancia Desplazamiento	46.2 ft / 14.1 m
Rail Gage Distance Ancho de la Viga	3.2 in / 82 mm
Duty Class Clase de Servicio	M4






Model/Modelo	PWS3T
Capacity Capacidad	6614 lb / 3000 kg
Length Longitud	6.5 ft / 2 m
Traveling Speed (per min) Velocidad Desplazamiento (por min)	65.5 ft / 20m
Motor Power Potencia Motor	0.4 kW
Gear Diameter Diámetro Engranaje	5.7 in / 145 mm
Duty Class Clase de Servicio	M4

Standard	ASME B30.11/ ANSI Z535.4/ ANSI/ ASCE7-88/ ANSI Z244.1/ ANSI/AA1264.1/ ANSI/ SAE Z26.1/ ANSI A14.3 CMAA No. 70-2000/ AISE No.6
Norma	


Country / Pais	Triphase / Trifasico
Argentina	380V @ 50Hz
Chile	380V @ 50Hz
Colombia	220V/440v @ 60Hz
Costa Rica	220V/440v @ 60Hz
Mexico	220V/440v @ 60Hz
Peru	220V/440v @ 60Hz
USA	220V/440v @ 60Hz

Check for options / Consulte por opciones

Dimensions in mm / Dimensiones en mm

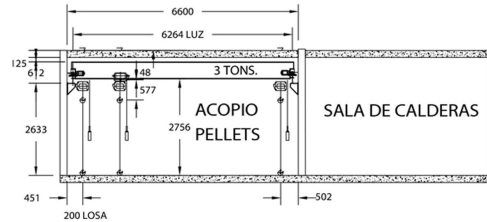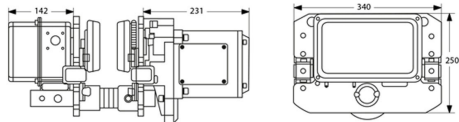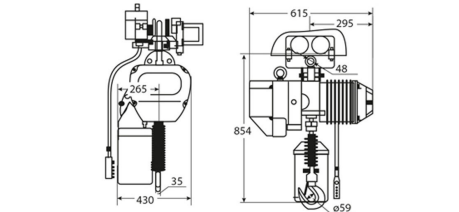

VISTA EN ELEVACION CARGA A IZAR: 1 TONELADA ESCALA 1:100

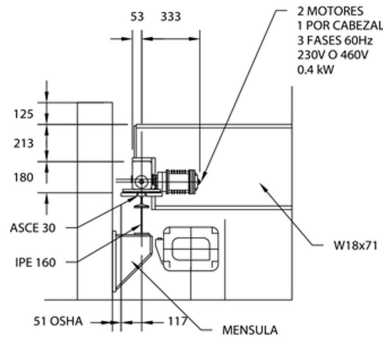

DETALLE CARGA A IZAR: 1 TONELADA ESCALA 1:25