



5 Tons Single Girder Top Running Underhung Hoist Crane 18m

Key features

- Load Capacity: Lifts up to 5 tons, suitable for diverse applications in manufacturing, warehousing, and assembly.
- Top Running Configuration: Provides smooth movement along the runway, enhancing operational efficiency and productivity.
- Durable Construction: Made from high-quality materials to withstand heavy use and harsh conditions, ensuring long-term reliability.
- 3 Year Warranty, Customer Support and Service in the USA

The 5 Tons Single Girder Top Running Underhung Hoist Crane Description






The 5 Tons Single Girder Top Running Underhung Hoist Crane is a versatile lifting solution designed to handle loads up to 5 tons in various industrial environments. Its efficient design makes it ideal for optimizing space while ensuring reliable performance.

Technical Specifications


Warranty	3 Year
----------	--------



Model/Modelo	PWMV5L6
Capacity	11023 lb / 5000 kg
Lifting Height	19.7 ft / 6 m
Span	41.3 ft / 12.6 m
Traveling Length	59.1 ft / 18 m
Duty Class	M4

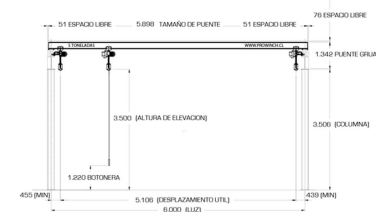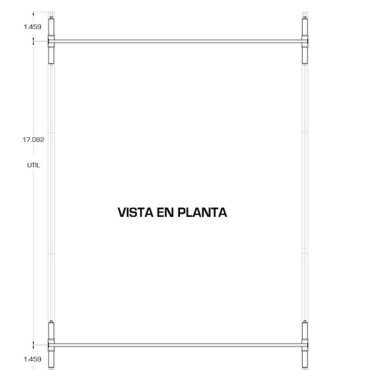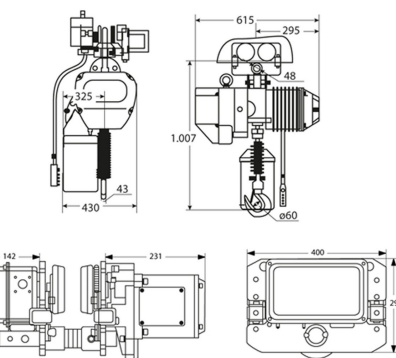

Model/Modelo	PWRC5B
Capacity	11023 lb / 5000 kg
Speed (per min)	3-8.9 ft / 0.9-2.7 m
Lifting Height	13.1 ft / 4 m
Motor Power	1.0 - 3.0 kW
Control Voltage	24V
Motor Rev.	1440 RPM
Insulation Grade	F
Traveling Speed (per m)	36 - 68 ft / 11-21 m
I Beam	3.94 - 7.01 in / 100 - 178 mm
Min. Turn Radius	4.9 ft / 1.5 m
Load Chain Grade	80 FEC
Chain Size	Ø7/16 in x 59.1 ft Ø11.2 mm x 18 m
Chain Falls	2
Bearings	SNK
Net Weight	582 lb / 264 kg
Standard	ASME B30.17



Model/Modelo	PWETST200
Capacity	11023 lb / 5000 kg
Traveling Speed (per min)	16 - 59 ft / 5 - 18 m
Motor Power	2 x 0.4 kW
Length	6.56 ft / 2 m
Wheels Diameter	Ø7.68 in / Ø195 mm

Check for options / Consulte por opciones

Warranty: 3 Year / Certification valid for 1 year / 10 year parts and service availability
Garantía: 3 Años / Certificación válida por 1 año / 10 Años disponibilidad de piezas y servicio