

1/2 Ton Power Trolley 220/460V 60HZ 3 Phase with Limit Switches Pendant not Included

Key features


- US and EC Standards ASME HST-1 , ASME B30.17 , EN14492-2 , EN60204-32
- Heavy Duty I-beam Electric Trolley for secure movement along beams
- German-engineered Schneider UL Listed contactors, All ways Limit Switches, Emergency Stop
- Durable construction for long-term reliability and performance, Compatible S-beam and W-beam
- 3 Year Warranty, Customer Support and Service in the USA

1/2 Ton Power Trolley Description

This 1/2 ton power trolley is designed for heavy-duty lifting applications, offering compatibility with both 220V and 460V power sources. It features built-in limit switches for enhanced safety, though the pendant control is not included.

Technical Specifications

Warranty 3 Year

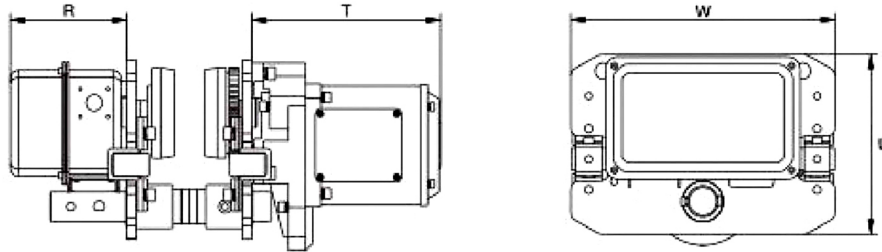

Model / Modelo	PWQE1Ti	PWQE2Ti	PWQE3Ti	PWQE5Ti	PWQE7Ti	PWQE10Ti	
Dimensions / Dimensiones	W	12.4 in / 315mm	12.7 / 325mm	13.3in / 340mm	15.7 in/ 400mm	26.5 in / 670 mm	19.6in / 500mm
	U	8.3 in / 212mm	8.6mm / 220mm	9.8 in / 250mm	11.4 in / 291mm	-	14.6in / 371mm
	R	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	9 in / 231 mm	5.5 in / 142mm
	T	9 in / 231mm	9 in / 231mm	9 in / 231mm	9 in / 231mm	5.6 in / 142 mm	9 in / 231mm

Unit Weight & Dimensions

T Trolley Motor Width	9.09 in / 231 mm
A Total Height	8.5 in / 212 mm
R Trolley Cover Width	6 in / 142 mm
W Width	12 in / 315 mm
Total Unit Weight	74.8 lbs / 34 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	74.8 lbs / 34 Kg
Package 1 Width	14 in / 35.56 cm
Package 1 Gross Weight	83.6 lbs / 38 Kg
Package 1 Height	16 in / 40.64 cm
Package 1 Length	22 in / 55.88 cm