

1/2 Ton 2 Speed Power Trolley 220/460V 60HZ with Limit Switches Pendant not Included

Key features


- US and EC Standards ASME HST-1 , ASME B30.17 , EN14492-2 , EN60204-32
- Heavy Duty I-beam Electric Trolley for secure movement along beams
- German-engineered Schneider UL Listed contactors, All ways Limit Switches, Emergency Stop
- Durable construction for long-term reliability and performance, Compatible S-beam and W-beam
- 3 Year Warranty, Customer Support and Service in the USA

1/2 Ton 2 Speed Power Trolley Description

This 1/2 Ton 2-Speed Power Trolley offers a powerful and versatile lifting solution, ideal for industrial applications. With a capacity of 1/2 ton and dual-speed control, it provides precise and efficient load handling. It operates on 220/460V, 60HZ power and comes with built-in limit switches for added safety. Please note that the pendant is not included.

Technical Specifications

Rated Load Capacity	1100 lb / 500 kg	I-Beam Width Range	52 - 153 mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Minimum Turn Radius	2.6 ft / 0.8 m
Trolley Speed /min	36 - 68 ft /11 - 21 m	Warranty	3 Year

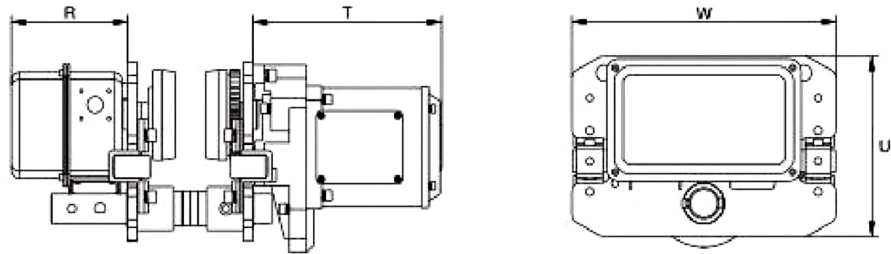

Model / Modelo		PWQE1Ti	PWQE2Ti	PWQE3Ti	PWQE5Ti	PWQE7Ti	PWQE10Ti
Dimensions / Dimensiones	W	12.4 in / 315mm	12.7 / 325mm	13.3in / 340mm	15.7 in/ 400mm	26.5 in / 670 mm	19.6in / 500mm
	U	8.3 in / 212mm	8.6mm / 220mm	9.8 in / 250mm	11.4 in / 291mm	-	14.6in / 371mm
	R	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	9 in / 231 mm	5.5 in / 142mm
	T	9 in / 231mm	9 in / 231mm	9 in / 231mm	9 in / 231mm	5.6 in / 142 mm	9 in / 231mm

Unit Weight & Dimensions

T Trolley Motor Width	5.6 in / 142 mm
D Depth	11.3 in / 288 mm
R Trolley Cover Width	9 in / 231 mm
W Width	21.5 in / 545 mm
Total Unit Weight	83.6 lbs / 38 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	83.6 lbs / 38 Kg
Package 1 Width	16 in / 40.64 cm
Package 1 Gross Weight	92.4 lbs / 42 Kg
Package 1 Height	18 in / 45.72 cm
Package 1 Length	23 in / 58.42 cm