

## 1 Ton 2 Speed Power Trolley 220/460V 60HZ with Limit Switches Pendant not Included


### Key features

- US and EC Standards ASME HST-1 , ASME B30.17 , EN14492-2 , EN60204-32
- Heavy Duty I-beam Electric Trolley for secure movement along beams
- German-engineered Schneider UL Listed contactors, All ways Limit Switches, Emergency Stop
- Durable construction for long-term reliability and performance, Compatible S-beam and W-beam
- 3 Year Warranty, Customer Support and Service in the USA

1 Ton 2 Speed Power Trolley 230/460V 60HZ with Limit Switches Pendant not Included

## Technical Specifications

<b>Rated Load Capacity</b>	2200 lb / 1000 kg	<b>Trolley Speed /min</b>	36 - 68 ft / 11 - 21 m
<b>Capacity Range</b>	2	<b>I-Beam Width Range</b>	52 - 153 mm
<b>Voltage</b>	3 Phase 208~240/440~480V 50/60Hz	<b>Minimum Turn Radius</b>	2.6 ft / 0.8 m
<b>Total Power Watts</b>	0.4 kW	<b>Warranty</b>	3 Year

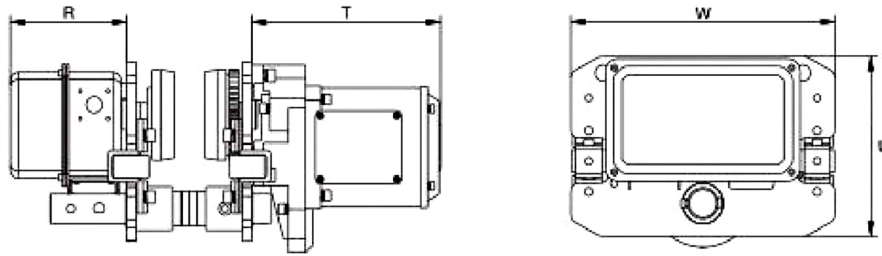

Model / Modelo	PWQE1Ti	PWQE2Ti	PWQE3Ti	PWQE5Ti	PWQE7Ti	PWQE10Ti	
Dimensions / Dimensiones	<b>W</b>	12.4 in / 315mm	12.7 / 325mm	13.3in / 340mm	15.7 in/ 400mm	26.5 in / 670 mm	19.6in / 500mm
	<b>U</b>	8.3 in / 212mm	8.6mm / 220mm	9.8 in / 250mm	11.4 in / 291mm	-	14.6in / 371mm
	<b>R</b>	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	9 in / 231 mm	5.5 in / 142mm
	<b>T</b>	9 in / 231mm	9 in / 231mm	9 in / 231mm	9 in / 231mm	5.6 in / 142 mm	9 in / 231mm

## Unit Weight & Dimensions

<b>T Trolley Motor Width</b>	5.6 in / 142 mm	<b>Package 1 Net Weight</b>	90.2 lbs / 41 Kg
<b>D Depth</b>	12 in / 300 mm	<b>Package 1 Width</b>	16 in / 40.64 cm
<b>R Trolley Cover Width</b>	9 in / 231 mm	<b>Package 1 Gross Weight</b>	99 lbs / 45 Kg
<b>W Width</b>	23 in / 582 mm	<b>Package 1 Height</b>	18 in / 45.72 cm
<b>Total Unit Weight</b>	90.2 lbs / 41 Kg	<b>Package 1 Length</b>	23 in / 58.42 cm

## Packaging Weight & Dimensions