



3 Ton I Beam Manual Pushing Trolley with rubber bump stops

Key features



- US and EC Standards ASME HST-1 , ASME B30.17 , EN14492-2 , EN60204-32
- Equipped with rubber bump stops and safety pins for enhanced safety and protection
- Heavy Duty I-beam manual pushing a trolley for smooth movement along beams
- Durable construction for long-term reliability and performance, Compatible S-beam and W-beam
- 3 Year Warranty, Customer Support and Service in the USA

3 Ton I Beam Manual Pushing Trolley with rubber bump stops Description

The 3 Ton I Beam Manual Pushing Trolley with rubber bump stops is a robust solution for effective material handling in industrial settings. With a lifting capacity of 3 tons (6,000 lbs), this trolley is designed to move smoothly along standard I-beams, making it perfect for warehouses, construction sites, and workshops. The rubber bump stops enhance safety by preventing the trolley from rolling off the beam, ensuring secure operation during use. Its durable construction and user-friendly design facilitate easy maneuvering and reliable performance, making it an essential tool for lifting and transporting heavy loads.

Technical Specifications

Rated Load Capacity	6600 lb / 3000 kg	Minimum Turn Radius	4 ft / 1.2 m
I-Beam Width Range	3~6 in / 82~153 mm	Warranty	3 Year

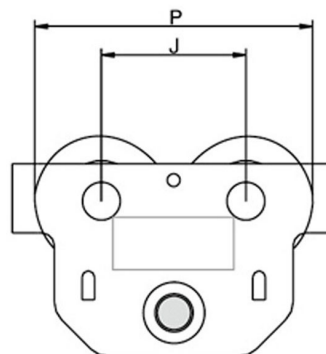

Model / Modelo		PWQM1T	PWQM3T	PWQM5T	PWQM10T
Dimensions / Dimensiones	F	7.5 in / 190 mm	10.8 in / 275 mm	10.8 in / 275 mm	13.4 in / 340 mm
	G	5.3 in / 135 mm	8.1 in / 205 mm	9.3 in / 236 mm	12.6 in / 320 mm
	P	6.3 in / 160 mm	10.4 in / 265 mm	12 in / 305 mm	14.4 in / 365 mm
	J	3.5 in / 90 mm	5.4 in / 138 mm	6.2 in / 157 mm	7.7 in / 195 mm

Unit Weight & Dimensions

Total Unit Weight	51 lbs / 24 Kg
--------------------------	----------------

Packaging Weight & Dimensions

Package 1 Net Weight	51 lbs / 23 Kg
Package 1 Width	12 in / 30.48 cm
Package 1 Gross Weight	46 lbs / 21 Kg
Package 1 Height	8 in / 20.32 cm
Package 1 Length	15 in / 38.1 cm