



Heavy Duty 10 Ton Capacity Manual Chain Trolley 20000 lb Geared



Key features

- 3 Year Warranty, Customer Support and Service in the USA

Gearing provides positive load positioning along the beam. Light-weight trolleys fit most I-, S-, and W-beams. 10 ton geared trolley Designed with durable baked enamel paint protection and precision ball bearing wheels. With a manual-chain operated gear trolley for use on overhead equipment beyond operator's reach, low headroom for work in tight spaces, and steel construction for strength. The trolley fits a range wide flange or S-type I-beams. Assembly required.

Technical Specifications

Rated Load Capacity	22000 lb / 10000 kg	Warranty	3 Year
Chain Length	80 ft	Chain Falls	40 ft
I-Beam Width Range	5~8 in / 122~203 mm	Standard Lifting Height	40 ft / 12 m
Minimum Turn Radius	5.6 ft / 1.7 m		

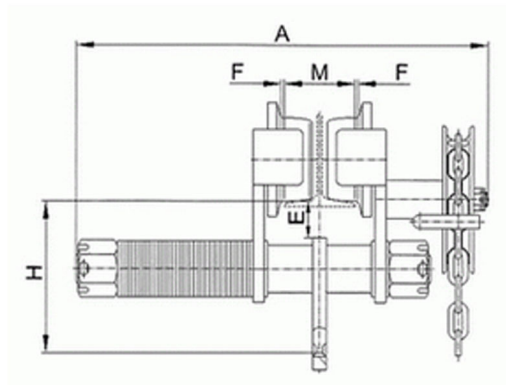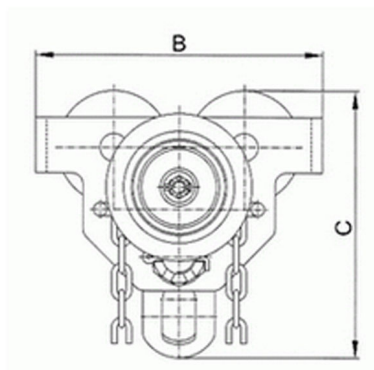

Model / Modelo		PWQMC05T	PWQMC1T	PWQMC3T	PWQMC5T	PWQMC10T	PWQMC20T
Dimensions / Dimensiones	A	9.8 in / 250 mm	10.2 in / 260 mm	13 in / 330 mm	14.6 in / 370 mm	15.7 in / 400 mm	16.9 in / 430 mm
	B	7.7 in / 195 mm	8.3 in / 210 mm	11.8 in / 300 mm	13.7 in / 334.5 mm	18.1 in / 460 mm	22.8 in / 580 mm
	C	7.1 in / 180 mm	7.9 in / 200 mm	9 in / 228.5 mm	13.7 in / 334.5 mm	19.3 in / 490 mm	19.7 in / 500 mm
	H	3.5 in / 90 mm	3.7 in / 95 mm	5.5 in / 140 mm	6.7 in / 170 mm	10.8 in / 275 mm	11 in / 280 mm

Unit Weight & Dimensions

Total Unit Weight	211 lbs / 96 Kg
--------------------------	-----------------

Packaging Weight & Dimensions

Package 1 Net Weight	211 lbs / 96 Kg
Package 1 Width	20 in / 50.8 cm
Package 1 Gross Weight	220 lbs / 100 Kg
Package 1 Height	18 in / 45.72 cm
Package 1 Length	17 in / 43.18 cm