



3 ton 6600 lb 1 Speed 208~240/440~480V Electric Chain Hoist 30 ft. FEC G80 Japan Chain H4 Duty

Key features

- Load Capacity: 3 ton (6600 lbs), ideal for medium to heavy lifting tasks.
- Voltage: 208~240/440~480V, adaptable to various industrial power sources.
- Speed Setting: 1 Speed, provides consistent and reliable performance at a single speed.
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

Optimize your lifting operations with this 3-ton (6600 lb) electric chain hoist, offering reliable 1-speed performance. Suitable for 208~240/440~480V power sources, it features a robust 30 ft. FEC G80 Japan chain for enhanced durability. With an H4 Duty rating, this hoist is designed to handle rigorous lifting tasks in demanding environments, ensuring dependable performance and efficiency.

Prowinch Electric Chain Hoist

All of our Electric Chain Hoists are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Key Components

All internal components have been upgraded to meet the highest quality standards. Key electronic components are produced by American or German brands, and we use American-made lubricants to ensure the lifespan of gears and reducers. Final assembly and all tests are performed in the US before shipping to ensure that every unit meets the corresponding standard.

Duty Classification

Duty Classification is a key factor when choosing the right unit. These H4 hoists are suitable for high-volume handling in steel warehouses, machine shops, fabricating plants and mills, and foundries. For uniformly distributed work periods, the hoists have 50% max. operational time per hour and can handle up to 300 starts per hour. When being used for infrequent work periods, the hoist can be operated for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings are calculated at a 65% load factor, as per ASME HST-1-2012.

Control System


This electric chain hoist comes standard with a pendant control. The length of the control is 4 feet less than the lifting height, which allows it to be easily operated from ground-level. An optional wireless control is available for extra convenience.

Braking System

The electromagnetic brake system is tested at 125% of the hoist capacity and is designed to automatically engage immediately upon any loss of power.

Technical Specifications

Rated Load Capacity	6600 lb / 3000 kg	Control	Pendant Control and Optional Wireless
Standard Lifting Height	20 ft / 6 m	Control Voltage	24V
Speed (f/m) / min	26ft/8m@60Hz 21.7ft/6.6m@50Hz	Emergency Stop	Yes
Number of Speeds	1 Speed	Transmission / Reducer Type	Spur gearbox with Oil splash lubrication
Voltage	3 Phase 208~240/440~480V 50/60Hz	Load Chain Type	G80 JAPAN
Available Voltages	208~240/440~480V for USA and 380/440~480V for CHILE	Load Chain Size	11.2x34 mm
Duty Class	H4/M5/2m/Class D	Chain Falls	1
Motor Power (6)	3 kW	Chain Length	30 ft / 9 m
Motor RPM	1728@60Hz 1440@50HZ	Humidity	<85%
Motor Brake	Yes DC Electromagnetic	Temperature	-4 ~ 104° F / -20 ~ 40° C
Insulation Grade	F	Noise Level	81 dB
IEC Motor Protection	IP55	Standards Compliance	ASME HST-1 , ASME B30.16, EN60204-32
Dynamic Brake	Only with Optional VFD	Warranty	3 Year

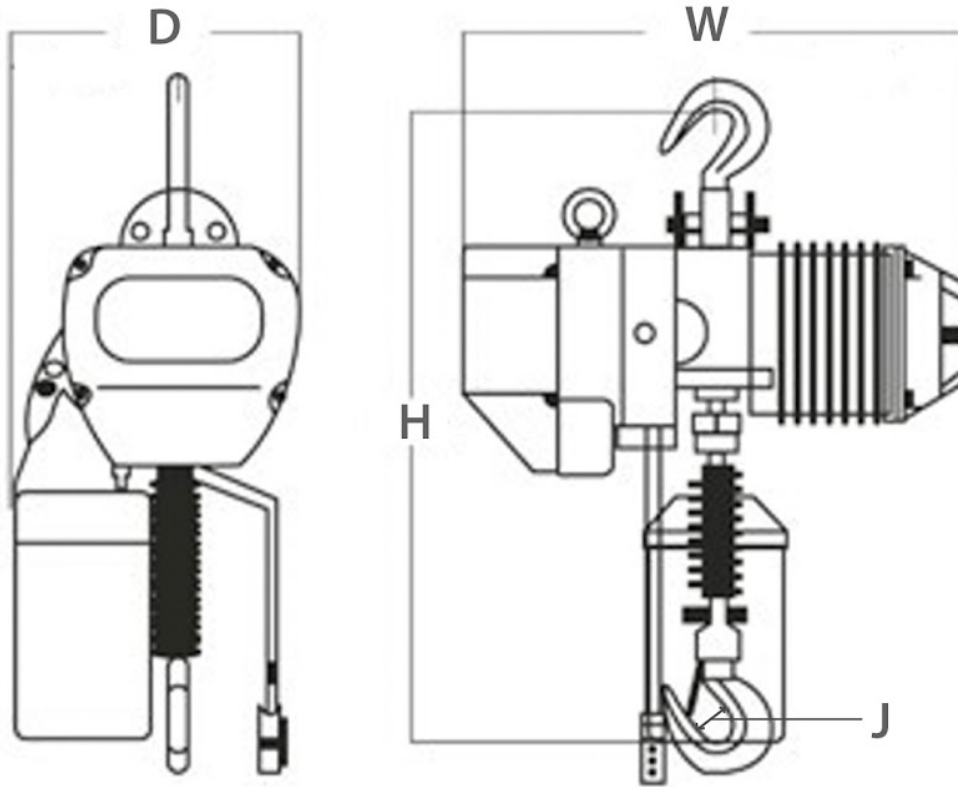

Dimensions	Model	PWR1M5	PWR2M5	PWR3M5	PWR5M5
	H	16 in / 410 mm	24 in / 615 mm	24 in / 615 mm	33 in / 845 mm
	W	24 in / 620 mm	29 in / 745 mm	29 in / 745 mm	29 in / 745 mm
	D	12 in / 295 mm	17 in / 420 mm	17 in / 420 mm	17 in / 420 mm
	J	1.3 in / 34 mm	1.6 in / 40 mm	1.9 in / 48 mm	1.9 in / 48 mm



Unit Weight & Dimensions

Packaging Weight & Dimensions

H Minimum Headroom	33.26 in / 845 mm	Package 1 Net Weight	282 lbs / 128 Kg
W Width	29 in / 745 mm	Package 1 Width	16 in / 40.64 cm
D Depth	17 in / 420 mm	Package 1 Gross Weight	304 lbs / 138 Kg
J Hook Opening	1.9 in / 48 mm	Package 1 Height	34 in / 86.36 cm
Total Unit Weight	282 lbs / 128 Kg	Package 1 Length	28 in / 71.12 cm