



## 5 ton 11000 lb 208~240/440~480V 2 Speed Electric Chain Hoist 30 ft. FEC G80 Japan Chain H4 Duty

### Key features


- Load Capacity: 5 ton (11,000 lbs), ideal for heavy lifting tasks.
- Voltage: 08~240/440~480V, versatile for various industrial setups.
- Speed Settings: 2 Speed, provides flexibility with lifting speeds.
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

Upgrade your lifting capabilities with this 5-ton (11,000 lb) electric chain hoist, featuring dual speed control for versatile operation. Suitable for 208~240/440~480V power sources, it includes a 30 ft. FEC G80 Japan chain for exceptional strength and durability. With an H4 Duty rating, this hoist is engineered to handle demanding industrial tasks efficiently and reliably.

## Technical Specifications

<b>Pendant Control Yes No</b>	Included	<b>Control Voltage</b>	24v
<b>Pendant Control Emergency Stop</b>	Yes	<b>Emergency Stop</b>	Yes
<b>Rated Load Capacity</b>	11000 lb / 5000 kg	<b>Transmission / Reducer Type</b>	Spur gearbox with Oil splash lubrication
<b>Standard Lifting Height</b>	30 ft / 9 m	<b>Load Chain Type</b>	FEC G80 Japan
<b>Speed (f/m) / min</b>	4 - 11 ft/min. / 1.2 & 3.34 m/min	<b>Load Chain Size</b>	11.2 x 34 mm
<b>Number of Speeds</b>	2 Speed	<b>Rig Chain Falls / Lines</b>	2
<b>Voltage</b>	3 Phase 208~240/440~480V 50/60Hz	<b>Chain Length (ft)</b>	60 ft / 18 m
<b>Duty Class</b>	H4/M5/2m/Class D	<b>Humidity</b>	<85%
<b>Motor Power</b>	3 kW	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Motor Brake</b>	Yes DC Electromagnetic	<b>Noise Level</b>	81 dB
<b>Motor Insulation Grade</b>	F	<b>Standards Compliance</b>	ASME HST-1 , ASME B30.16, EN60204-32
<b>IEC Motor Protection</b>	IP55	<b>Warranty</b>	3 Year
<b>Variable Fequency Driver</b>	VFD Hitachi HS300-040H	<b>Contacto Brand</b>	Schneider
<b>Dynamic Brake</b>	Yes	<b>IEC Pendant Control Protection</b>	IP66
<b>Control Included</b>	Pendant Control w/ Emergency Stop		

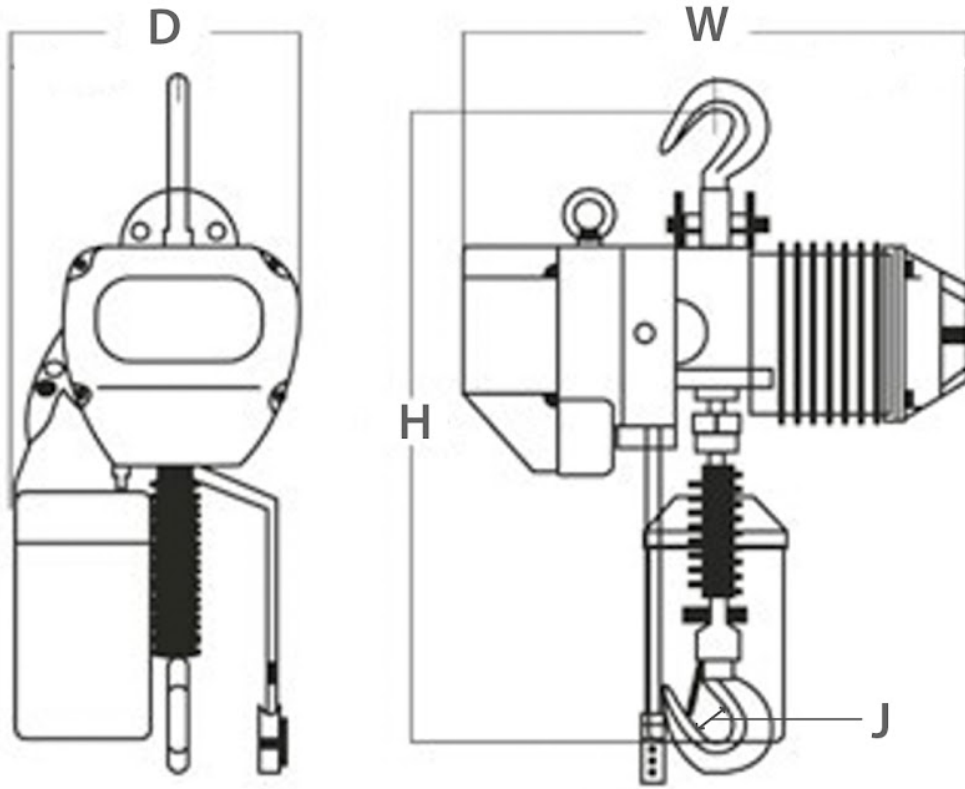

Dimensions	Model	PWR1M5i	PWR2M5i	PWR3M5i	PWR5M5i
	H	16 in / 410 mm	24 in / 615 mm	24 in / 615 mm	33 in / 845 mm
	W	24 in / 620 mm	30 in / 745 mm	30 in / 745 mm	30 in / 745 mm
	D	12 in / 295 mm	17 in / 420 mm	17 in / 420 mm	17 in / 420 mm
	J	1.3 in / 34 mm	1.6 in / 40 mm	1.9 in / 48 mm	1.9 in / 48 mm

## Unit Weight & Dimensions

<b>H Minimum Headroom</b>	40.5 in / 1030 mm
<b>W Width</b>	30 in / 745 mm
<b>D Depth</b>	17 in / 420 mm
<b>J Hook Opening</b>	1.9 in / 48 mm