



3 Tons Air Chain Hoist with Trolley 9 meters lifting - ATEX Explosion Proof




Key features

- 3 Tons Pneumatic Chain Hoist - Heavy Duty - Explosion Proof
- RUD G80 chain made in Germany - 9 meters lifting height (other heights available upon request) Safety factor 5:1
- Includes: Multi-disc slip clutch load limiter / Pendant Control with emergency stop (8 meters) / Chain containers
- Meets and exceeds ASME B30.16 B30.17 / HST-5 standards / Load Test at 130% SWL / ATEX Directive
- 3 Year Warranty, Customer Support and Service in the USA

3 Tons Air Chain Hoist with Trolley 9 meters lifting - ATEX Explosion Proof

Technical Specifications

Rated Load Capacity	3 Ton	Air Inlet Size	3/4" BSP
Standard Lifting Height	30 ft / 9 m	Air hose dimension	19 - 25 mm (3/4 - 1 ")
Number of Speeds	1 Speed	Air Consumption	75 cfm / 2.1 m3/min
Air Hoist Lifting Speed at Rated Load	4.5 m/min	Transmission / Reducer Type	Epicycle Gearbox (Grease Filled and Seald)
Air Hoist Lifting Speed Unloaded	5.8 m/min	Load Chain Type	G80 RUG Germany 5:1 Safety Factor
Air Hoist Lowering Speed at Rated Load	6.2 m/min	Load Chain Size	11.2 x 34 mm
Maximum Safe Overload	Overload Protection Slip Clutch 130% WLL	Chain Falls	1
Explosion Proof Protection	EX 2 GD IIA T4 EX 2 GD IIB T4 EX 2 GD IIC T4 ZONES 1, 2 AND 21, 22 - Copper Coated: Chain hook, bottom block, Sprocket, Load sleeve, Safety Catch - Stainless Steel Wheels	Chain Length	9 m
Protection Exclusions	- HYDROGEN DISULPHIDE - ETHELENE OXIDE	Trolley Power	0.3 kW
Duty Class	100% Duty Cycle	Noise Level	84 dBA @ 1m
Motor/Engine Type	Vane Rotary Motor - Lubrication Free - Rust Free & Replaceable Stainless Steel Cylinder	Trolley Speed /min	12 m/min
Motor/Engine Power	3.2 kw	Trolley Number of Speeds	1
Motor Brake	>125% WLL Automatic self-adjusting multidisc Brake	I-Beam Width Range	65 - 280 mm
Control	Pendant Control 4 buttons w/emergency stop	Minimum Turn Radius	1.5 m
Emergency Stop	Yes, on pendant Control	Standards Compliance	ASME B30.11 / B30.16 / B30.17 / HST-5 DIN EN818-7 SANS 1638 compliant ATEX EX Classification according to EC Directive on Hazardous Locations 94/9/EEC
Operating Temperature Range	-20°C to 70°C	Made in	Southafrica
Air Pressure	4 - 6 Bar	Warranty	3 Year

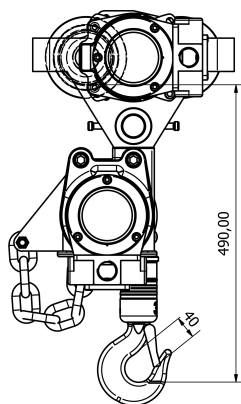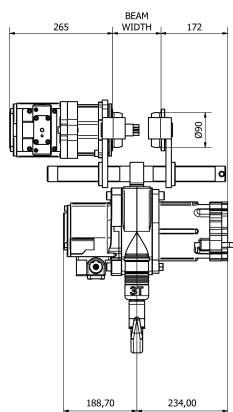

Unit Weight & Dimensions

H Minimum Headroom

520 mm