



1000 lb Electric Chain Hoist Power Trolley 115V/230V 20ft G100 Chain UL Wireless

Key features

- High quality Hoist with UL Certification, Includes both a wired and wireless remote
- Overload Protection and Heavy Duty, Durable G100 Chain
- Key safety features such as all-way limit switches, emergency stop, and automatic brake system.
- Meets US and EU Standards ASME HST-1, ASME B30.16, EN14492-2, EN60204-32.
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

The Prowinch 1,000 lb Electric Chain Hoist allows you to easily lift loads up to 20 feet. The powerful motor and single phase electrical connection are perfect for use in home or industrial applications.

Prowinch Electric Chain Hoist

All of our **Electric Chain Hoists** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Key Components

All internal components have been upgraded to meet the highest quality standards. Key electronic components are produced by American or German brands, and we use American-made lubricants to ensure the lifespan of gears and reducers. Final assembly and all tests are performed in the US before shipping to ensure that every unit meets the corresponding standard.

Duty Classification

Duty classification is a key factor when choosing the right unit. These H3 hoists are suitable for general machine shop fabricating, assembly, storage, and warehousing. For uniformly distributed work periods, the hoists have 25% max. operational time per hour and can handle up to 150 starts per hour. When being used for infrequent work periods, the hoist can be operated for 30 minutes from a cold start with up to 200 starts per hour. Operational time ratings are calculated at a 65% load factor, as per ASME HST-1-2012.

Control System



This **Electric Chain Hoist** comes with a pendant control with up, down, and emergency stop. The length of the pendant control is 4 feet less than the lifting height, which allows it to be easily operated from ground-level.

Braking System

The **electromagnetic brake system** is tested at 125% of the hoist capacity and is designed to automatically engage immediately upon any loss of power.

Technical Specifications

Rated Load Capacity	1000 lbs	Emergency Stop	Yes
Standard Lifting Height	20 ft / 6 m	Load Chain Type	G100
Speed /min	16 ft / 5 m	Load Chain Size	6.3 x 19 mm
Number of Speeds	1 Speed	Chain Falls	1
Voltage	1 Phase 110~120/220~240V 50/60Hz	Chain Length	20 ft / 6 m
Total Power Watts	500	Humidity	<85%
FCC ID	2AZMK-Q1212	Temperature	-4 ~ 104° F / -20 ~ 40° C
Duty Class	H3/M4/1Am/Class C	Noise Level	81 dB
Motor/Engine Power	0.65 kW	Trolley Speed /min	33ft.
Motor Brake	Yes	Trolley Number of Speeds	1
Insulation Grade	F	I-Beam Width Range	7 in
IEC Motor Protection	IP55	Standards Compliance	UL 1340, ASME HST-1 , ASME B30.16 , B30.17 , EN60204-32
Control	Pendant Control and Industrial Wireless Control	UL File	MSXT.E528915 - Hoists
Control Voltage	24V	Warranty	3 Year

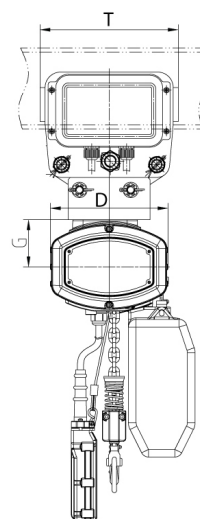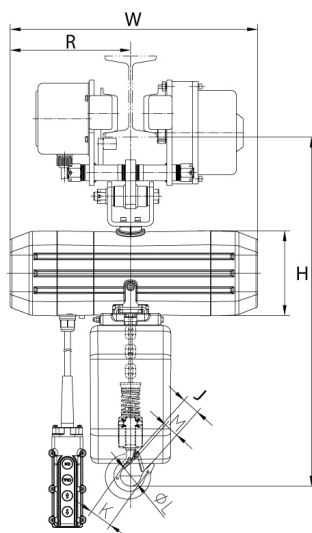

Unit Weight & Dimensions

H Minimum Headroom	22 in
W Width	18.6 in
D Depth	9 in
J Hook Opening	1.2 in

Packaging Weight & Dimensions

Package 1 Gross Weight	183 lbs / 83 Kg
Package 1 Width	31 in / 78.74 cm
Package 1 Length	21 in / 53.34 cm
Package 1 Height	37 in / 93.98 cm