



1/2 ton Electric Chain Hoist 1 Speed 380V 3ø 50HZ 13ft G100 Nickel Duty H4/M5

Key features

- Lifting Capacity: 1/2 ton (1,000 lbs)
- Power Supply: 380V, 3-phase, 50Hz
- Chain Type: Heavy-duty construction for increased durability
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

The 1/2 Ton Electric Chain Hoist is designed for robust performance in industrial environments, capable of lifting loads up to 1/2 ton. Operating on 380V, 3-phase, 50Hz power, this hoist features a single speed for consistent and reliable operation. Its durable construction ensures longevity, making it suitable for a variety of heavy lifting tasks. Ideal for warehouses and manufacturing, this hoist is engineered for safety and efficiency.

Our Dedication to Excellence:

At Prowinch, our unwavering commitment to delivering the best price-performance ratio is evident in every Electric Chain Hoist we produce. We subject each unit to meticulous testing and continuously enhance key components, considering factors that influence lifespan. This commitment ensures that we consistently provide a superior product at an optimal price point.

Enhanced Components:

Internally, each component has undergone substantial upgrades to meet the highest quality standards. Key electronic parts are carefully sourced from reputable brands, while locally manufactured lubricants are employed to fortify the durability of gears and reducers. The final assembly and testing processes take place in the US, guaranteeing that every unit surpasses corresponding standards.

Single Speed Efficiency:

Our Single Speed Electric Chain Hoist is designed for straightforward yet efficient lifting operations. Perfect for applications where a consistent lifting speed is paramount, this hoist offers reliability and ease of use.

Duty Classification:

Choosing the right unit is pivotal, and our M5-rated H4 hoists stand out for their excellence in high-volume handling. Tailored for environments like steel warehouses, machine shops, fabricating plants, and mills, these hoists boast a 50% maximum operational time per hour for uniformly distributed work periods. They can efficiently handle up to 300 starts per hour. In scenarios of infrequent work periods, the hoist can operate for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings adhere to a 65% load factor, following ASME HST-1-2012 guidelines.

Control System:


The Single Speed Electric Chain Hoist comes with a standard pendant control, designed with a length 4 feet less than the lifting height, ensuring easy operation from ground level. For added convenience, an optional wireless control is available.

Advanced Braking System:

Our hoists feature an electromagnetic brake system, rigorously tested at 125% of the hoist capacity. This system is intelligently designed to engage automatically upon any loss of power, ensuring not only enhanced safety but also precise control over the operation of the hoist.

Technical Specifications

Rated Load Capacity	1/2 ton	Total Power Watts	750
Capacity Range	1	Power Cord Length and Phase Order	3 ft / Red L1, White L2 and Black L3, Green ground
Voltage	3 Phase 380V 50Hz	Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 10A
Standard Lifting Height	13 ft / 4 m	Optional Load Chain Brand & Country of Origin	FEC Japan
Speed (f/m) / min	31.49 ft @60Hz 8 mt @50Hz	Load Chain Type	G100 Nikel
Number of Speeds	1 Speed	Load Chain Size	6.3mm
Hoist Contactors Amps	10A	Chain Falls	1
Hoist Contactor Brand	Schneider	Chain Length	13
Hoist UL Components	UL Listed Contactors	Load Chain weight per foot [lbs]	0.36
Hoist Contactor Coil Voltage	48V	Humidity	20%~90%
Duty Class	H4/M5/2m/Class D	Temperature	-4 ~ 104° F / -20 ~ 40° C
IEC Hoist IP Protection	IP55	Transmission / Reducer Type	Spur gearbox
IEC Motor Protection	IP55	Reducer Lubrication Type	Oil
Pendant Control Yes No	Yes	Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments
IEC Pendant Control Protection	IP66	Standards Compliance	ASME HST-1 , ASME B30.16 , EN60204-37
Pendant Control Emergency Stop	Yes	Standards Certified	CE
Pendant Control total Length	10 ft	Overload Protection	Overload Motor Clutch
Hoist Motor Power in KW	0.75	Hour Meter	Internal Working Hour Meter
Hoist Motor Brake Type and DC Voltage	DC170V	Brake SKU	PWRX-0.25-0.5-PN.4.11
Hoist Motor Insulation Grade	F	Brake rectifiers-half-wave	PWRX-BKTF-HW

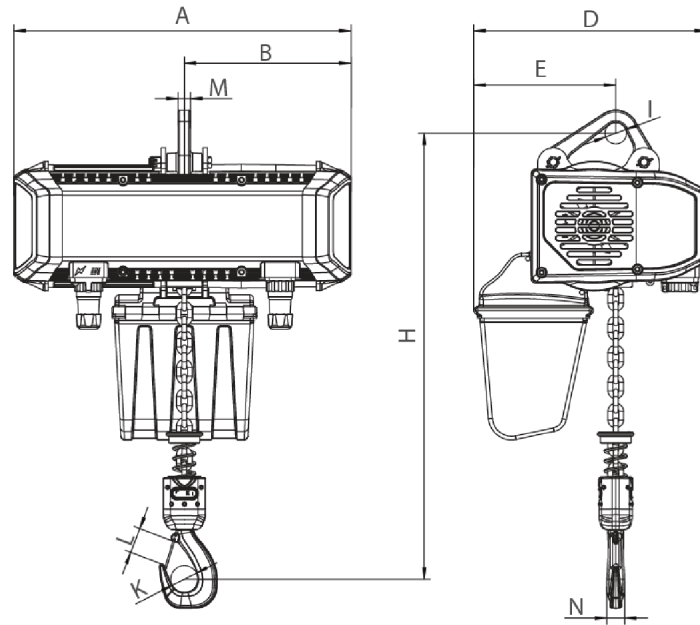

[Size list: mm]

Rated load (t)	Type	Minimum distance between hooks: H	A	B	D	E	I	M	N	K	L
0.25	PWRXF0.25-01	385	440	218	305	186	28	16	20	35	31
0.5	PWRXF0.5-01	385	440	218	305	186	28	16	20	35	31

Unit Weight & Dimensions

A Total Height	396
J Hook Opening	35
W Width	305
H Minimum Headroom	396
D Depth	440
1st Package Type	Wood Crate
Total Weight (w/out cable or Chain)	56
Total Unit Weight	61.16 lbs / 28 Kg

Packaging Weight & Dimensions

Package 1 Height	20 in / 50.8 cm
Package 1 Net Weight	61.16 lbs / 28 Kg
Package 1 Width	15 in / 38.1 cm
Package 1 Gross Weight	74.8 lbs / 34 Kg
Package 1 Length	20 in / 50.8 cm