



1/2 ton Electric Chain Hoist 2 Speed 380V 3ø 50HZ 13ft G100 Nickel Duty H4/M5

Key features

- Load Capacity: Lifts up to 1/2 ton (1,100 lbs.), suitable for light to medium-duty lifting applications.
- Voltage: Operates on 380V 3-phase, 50Hz electrical systems, providing compatibility with industrial power setups.
- Speed: Features dual-speed operation for enhanced control and flexibility in lifting and horizontal movement.
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

This 1/2-ton electric chain hoist features dual speed settings for versatile lifting. Designed for a 380V 3-phase 50Hz power supply, it includes a 13-foot G100 nickel-plated chain and is built to H4/M5 duty ratings. Ideal for a range of industrial applications, it offers reliable and efficient performance with enhanced control.

Our Dedication to Excellence:

At Prowinch, our unwavering commitment to delivering the best price-performance ratio is evident in every Electric Chain Hoist we produce. We subject each unit to meticulous testing and continuously enhance key components, considering factors that influence lifespan. This commitment ensures that we consistently provide a superior product at an optimal price point.

Enhanced Components:

Internally, each component has undergone substantial upgrades to meet the highest quality standards. Key electronic parts are carefully sourced from reputable brands, while locally manufactured lubricants are employed to fortify the durability of gears and reducers. The final assembly and testing processes take place in the US, guaranteeing that every unit surpasses corresponding standards.

Double Speed Precision:

Our Double Speed Electric Chain Hoist is engineered for versatility in lifting operations. Offering both high and low-speed options, this hoist provides precision and adaptability, making it suitable for a wide range of applications.

Duty Classification:

Choosing the right unit is pivotal, and our M5-rated H4 hoists stand out for their excellence in high-volume handling. Tailored for environments like steel warehouses, machine shops, fabricating plants, and mills, these hoists boast a 50% maximum operational time per hour for uniformly distributed work periods. They can efficiently handle up to 300 starts per hour. In scenarios of infrequent work periods, the hoist can operate for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings adhere to a 65% load factor, following ASME HST-1-2012 guidelines.

Control System:


The Double Speed Electric Chain Hoist features an advanced control system, providing flexibility with both high and low-speed options. The standard pendant control, designed with a length 4 feet less than the lifting height, ensures easy operation from ground level. For added convenience, an optional wireless control is available.

Advanced Braking System:

Our hoists feature an electromagnetic brake system, rigorously tested at 125% of the hoist capacity. This system is intelligently designed to engage automatically upon any loss of power, ensuring not only enhanced safety but also precise control over the operation of the hoist.

Technical Specifications

Rated Load Capacity	1/2 ton	Emergency Stop	Yes
Standard Lifting Height	13 ft / 4 m	Transmission / Reducer Type	Spur gearbox
Speed (f/m) / min	ft @60Hz 9,5 mt @50Hz	Load Chain Type	G100 Nickel
Number of Speeds	2 Speed	Load Chain Size	6.3mm
Voltage	3 Phase 380V 50Hz	Chain Falls	1
Total Power Watts	750	Chain Length	13
Duty Class	H4/M5/2m/Class D	Humidity	20%~90%
IEC Motor Protection	IP55	Temperature	-4 ~ 104° F / -20 ~ 40° C
Control	Pendant Control IP66 and Optional Wireless	Standards Compliance	ASME HST-1 , ASME B30.16 , EN60204-37
Control Voltage	48V	Warranty	3 Year

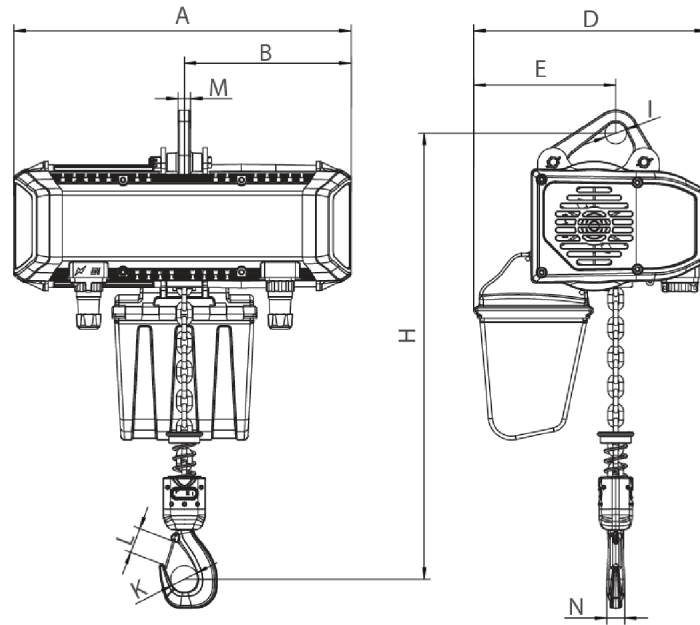

[Size list: mm]

Rated load (t)	Type	Minimum distance between hooks: H	A	B	D	E	I	M	N	K	L
0.25	PWRXF0.25-01	385	440	218	305	186	28	16	20	35	31
0.5	PWRXF0.5-01	385	440	218	305	186	28	16	20	35	31

Unit Weight & Dimensions

H Minimum Headroom	396
W Width	305
A Total Height	396
J Hook Opening	35
D Depth	440
Total Weight (w/out cable or Chain)	53
Total Unit Weight	61.16 lbs / 28 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	61.16 lbs / 28 Kg
Package 1 Width	15 in / 38.1 cm
Package 1 Gross Weight	74.8 lbs / 34 Kg
Package 1 Height	20 in / 50.8 cm
Package 1 Length	20 in / 50.8 cm