



## 1/2 ton Electric Chain Hoist Variable Speed 440~480V 3ø 50~60HZ 13ft G100 Nickel Duty H4/M5

### Key features

- Lifting Capacity: 1/2 ton (1,100 lbs)
- Power Supply: 440~480V, 3-phase, 50/60Hz
- Speed Control: Variable speed for precise lifting and positioning
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

The 1/2 Ton Electric Chain Hoist with variable speed control is designed for precision and adaptability in various industrial lifting applications. Capable of handling loads up to 1/2 ton, this hoist operates on 440~480V, 3-phase, 50/60Hz power, providing versatility for different operational needs. Its variable speed feature allows for smooth and controlled lifting, making it ideal for tasks requiring accuracy. Built for durability and safety, this hoist is perfect for demanding environments.

### Our Dedication to Excellence:

At Prowinch, our unwavering commitment to delivering the best price-performance ratio is evident in every Electric Chain Hoist we produce. We subject each unit to meticulous testing and continuously enhance key components, considering factors that influence lifespan. This commitment ensures that we consistently provide a superior product at an optimal price point.

### Enhanced Components:

Internally, each component has undergone substantial upgrades to meet the highest quality standards. Key electronic parts are carefully sourced from reputable brands, while locally manufactured lubricants are employed to fortify the durability of gears and reducers. The final assembly and testing processes take place in the US, guaranteeing that every unit surpasses corresponding standards.

### Variable Speed Innovation:

Designed for unparalleled control, our Variable Speed Electric Chain Hoist offers a dynamic lifting experience. Ideal for applications requiring precise load positioning, this hoist allows you to adjust lifting speeds according to the specific needs of your project.

### Duty Classification:

Choosing the right unit is pivotal, and our M5-rated H4 hoists stand out for their excellence in high-volume handling. Tailored for environments like steel warehouses, machine shops, fabricating plants, and mills, these hoists boast a 50% maximum operational time per hour for uniformly distributed work periods. They can efficiently handle up to 300 starts per hour. In scenarios of infrequent work periods, the hoist can operate for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings adhere to a 65% load factor, following ASME HST-1-2012 guidelines.

### Control System:


The Variable Speed Electric Chain Hoist is equipped with an advanced control system, allowing for precise speed adjustments tailored to your lifting requirements. The standard pendant control, designed with a length 4 feet less than the lifting height, ensures easy operation from ground level. For added convenience, an optional wireless control is available.

## Advanced Braking System:

Our hoists feature an electromagnetic brake system, rigorously tested at 125% of the hoist capacity. This system is intelligently designed to engage automatically upon any loss of power, ensuring not only enhanced safety but also precise control over the operation of the hoist.

## Technical Specifications

<b>Optional Load Chain Brand &amp; Country of Origin</b>	FEC Japan	<b>Voltage</b>	3 Phase 440~480V 60Hz
<b>Standards Certified</b>	CE	<b>Total Power Watts</b>	1500
<b>Recommended Hoist Protection Circuit Breaker AMPs and Type</b>	Type D 10A	<b>Duty Class</b>	H4/M5/2m/Class D
<b>Power Cord Length and Phase Order</b>	3 ft / Black L1 , Red L2 and Blue L3 □Green ground	<b>IEC Motor Protection</b>	IP55
<b>Pendant Control Yes No</b>	Yes	<b>Control</b>	Pendant Control IP66 and Optional Wireless
<b>Pendant Control Emergency Stop</b>	Yes	<b>Control Voltage</b>	24V
<b>Paint Specifications</b>	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	<b>Emergency Stop</b>	Yes
<b>Overload Protection</b>	Overload Motor Clutch	<b>Transmission / Reducer Type</b>	Spur gearbox
<b>Brake SKU</b>	PWRX-0.25-0.5-PN.4.11	<b>Load Chain Type</b>	G100 Nickel
<b>VFD Model</b>	Z230	<b>Load Chain Size</b>	6.3mm
<b>Brake Resistor Kw</b>	0.3Kw	<b>Rig Falls / Lines</b>	1
<b>Brake rectifiers-half-wave</b>	PWRX-BKTF-HW	<b>Chain Length</b>	13
<b>Rated Load Capacity</b>	1/2 ton	<b>Humidity</b>	20%~90%
<b>Standard Lifting Height</b>	13 ft / 4 m	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Speed (f/m) / min</b>	3.9~31.5 ft @60Hz mt @50Hz	<b>Standards Compliance</b>	ASME HST-1 , ASME B30.16 , EN60204-37
<b>Number of Speeds</b>	Variable Speed	<b>Warranty</b>	3 Year

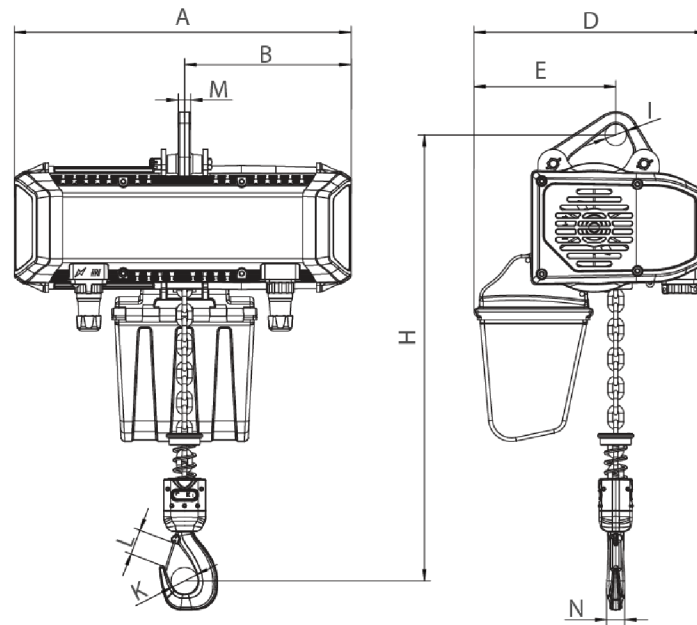

[Size list: mm]

Rated load (t)	Type	Minimum distance between hooks: H	A	B	D	E	I	M	N	K	L
0-25-0-5	PWRXF0-25-0-5-VS	399	447	217	337	179	31	16	20	35	31

## Unit Weight & Dimensions

H Minimum Headroom	396
W Width	305
A Total Height	396
J Hook Opening	35
D Depth	440
Total Weight (w/out cable or Chain)	64
<b>Total Unit Weight</b>	<b>72.16 lbs / 33 Kg</b>

## Packaging Weight & Dimensions

Package 1 Net Weight	72.16 lbs / 33 Kg
Package 1 Width	15 in / 38.1 cm
Package 1 Gross Weight	85.8 lbs / 39 Kg
Package 1 Height	20 in / 50.8 cm
Package 1 Length	20 in / 50.8 cm