



10 ton Electric Chain Hoist 1 Speed 380V 3ø 50HZ 40ft G100 Nickel Duty H4/M5

Key features

- Lifting Capacity: 10 tons (20,000 lbs)
- Power Supply: 380V, 3-phase, 50Hz
- Speed: Single speed operation for dependable lifting
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

The 10 Ton Electric Chain Hoist is designed for heavy-duty lifting in industrial environments. With a lifting capacity of 10 tons, this hoist operates on 380V, 3-phase, 50Hz power, providing robust performance for a variety of applications. Featuring a single speed for reliable and consistent operation, it is ideal for tasks that require significant lifting capacity. Built for durability and safety, this hoist is essential for demanding work environments.

Our Dedication to Excellence:

At Prowinch, our unwavering commitment to delivering the best price-performance ratio is evident in every Electric Chain Hoist we produce. We subject each unit to meticulous testing and continuously enhance key components, considering factors that influence lifespan. This commitment ensures that we consistently provide a superior product at an optimal price point.

Enhanced Components:

Internally, each component has undergone substantial upgrades to meet the highest quality standards. Key electronic parts are carefully sourced from reputable brands, while locally manufactured lubricants are employed to fortify the durability of gears and reducers. The final assembly and testing processes take place in the US, guaranteeing that every unit surpasses corresponding standards.

Single Speed Efficiency:

Our Single Speed Electric Chain Hoist is designed for straightforward yet efficient lifting operations. Perfect for applications where a consistent lifting speed is paramount, this hoist offers reliability and ease of use.

Duty Classification:

Choosing the right unit is pivotal, and our M5-rated H4 hoists stand out for their excellence in high-volume handling. Tailored for environments like steel warehouses, machine shops, fabricating plants, and mills, these hoists boast a 50% maximum operational time per hour for uniformly distributed work periods. They can efficiently handle up to 300 starts per hour. In scenarios of infrequent work periods, the hoist can operate for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings adhere to a 65% load factor, following ASME HST-1-2012 guidelines.

Control System:


The Single Speed Electric Chain Hoist comes with a standard pendant control, designed with a length 4 feet less than the lifting height, ensuring easy operation from ground level. For added convenience, an optional wireless control is available.

Advanced Braking System:

Our hoists feature an electromagnetic brake system, rigorously tested at 125% of the hoist capacity. This system is intelligently designed to engage automatically upon any loss of power, ensuring not only enhanced safety but also precise control over the operation of the hoist.

Technical Specifications

Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 30A	Emergency Stop	Yes
Power Cord Length and Phase Order	3 ft / Red L1, White L2 and Black L3, Green ground	Transmission / Reducer Type	Spur gearbox
Pendant Control Yes No	Yes	Load Chain Type	G100 Nickel
Pendant Control Emergency Stop	Yes	Load Chain Size	11.2 mm
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Chain Falls	4
Overload Protection	Overload Motor Clutch	Chain Length	160
Optional Load Chain Brand & Country of Origin	FEC Japan	Humidity	20%~90%
Standards Certified	CE	Temperature	-4 ~ 104° F / -20 ~ 40° C
Brake SKU	PWRX-2-20-PN.60.61	Standards Compliance	ASME HST-1 , ASME B30.16 , EN60204-38
Brake rectifiers-half-wave	PWRX-BKTF-HW	Warranty	3 Year
Rated Load Capacity	10 ton	Hoist Motor Power in KW	3+3
Standard Lifting Height	40 ft / 12 m	Hour Meter	Internal Working Hour Meter
Speed (f/m) / min	10.63 ft @60Hz 2.70 mt @50Hz	Hoist Motor Insulation Grade	F
Number of Speeds	1 Speed	Hoist Contactor Coil Voltage	24 V
Voltage	3 Phase 380V 50Hz	Hoist Contactors Amps	25A
Total Power Watts	6000	Hoist Contactor Brand	Schneider
Duty Class	H4/M5/2m/Class D	IEC Hoist IP Protection	IP55
IEC Motor Protection	IP55	IEC Pendant Control Protection	IP66
Control	Pendant Control IP66 and Optional Wireless	Hoist Motor Brake Type and DC Voltage	DC170V
Control Voltage	24V		

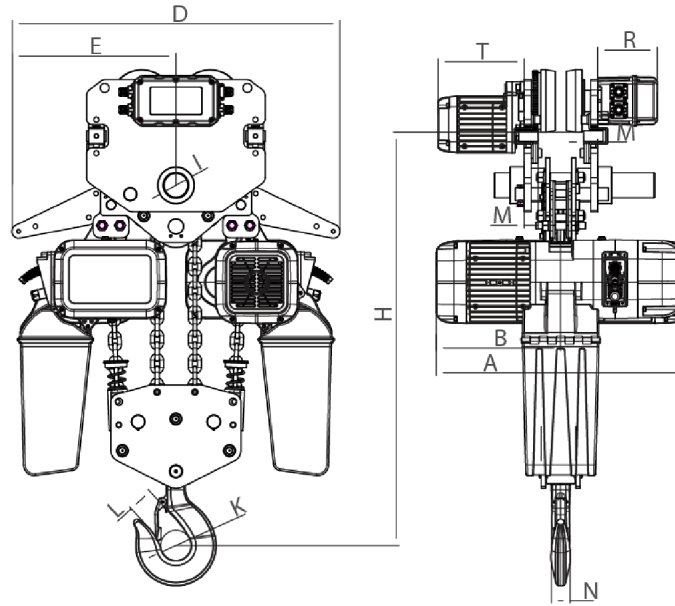

Rated load (t)	Type	Dimension (mm)													
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R	
10	PWRXT10-04	1045	700	3500-5500	350	920	460	70	39	48	85	80	242	167	

Unit Weight & Dimensions

H Minimum Headroom	1005
J Hook Opening	85
A Total Height	1200
Total Weight (w/out cable or Chain)	345
D Depth	700

Packaging Weight & Dimensions

Package 1 Net Weight	638 lbs / 289 Kg
Package 1 Width	30 in / 76.2 cm
Package 1 Gross Weight	682 lbs / 309 Kg
Package 1 Height	40 in / 101.6 cm
Package 1 Length	44 in / 111.76 cm

1st Package Type	Wood Crate
W Width	920
Total Unit Weight	638 lbs / 290 Kg