



## 1 ton Electric Chain Hoist w/ Power Trolley 1 Speed 380V 3ø 50HZ 20ft G100 Nickel Duty H4/M5

### Key features

- Load Capacity: 1 ton (2000 lbs), suitable for lifting heavy loads.
- 380V: Specific to regions with 380V electrical systems, typically used in European and Asian countries.
- Single Speed: Operates at a fixed speed, ideal for tasks requiring consistent lifting speed.
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

This 1-ton electric chain hoist features a power trolley for smooth horizontal movement and single-speed operation. It operates on a 380V 3-phase 50Hz power supply, providing reliable and efficient lifting performance for various industrial applications.

### Our Dedication to Excellence:

At Prowinch, our unwavering commitment to delivering the best price-performance ratio is evident in every Electric Chain Hoist we produce. We subject each unit to meticulous testing and continuously enhance key components, considering factors that influence lifespan. This commitment ensures that we consistently provide a superior product at an optimal price point.

### Enhanced Components:

Internally, each component has undergone substantial upgrades to meet the highest quality standards. Key electronic parts are carefully sourced from reputable brands, while locally manufactured lubricants are employed to fortify the durability of gears and reducers. The final assembly and testing processes take place in the US, guaranteeing that every unit surpasses corresponding standards.

### Single Speed Efficiency:

Our Single Speed Electric Chain Hoist is designed for straightforward yet efficient lifting operations. Perfect for applications where a consistent lifting speed is paramount, this hoist offers reliability and ease of use.

### Duty Classification:

Choosing the right unit is pivotal, and our M5-rated H4 hoists stand out for their excellence in high-volume handling. Tailored for environments like steel warehouses, machine shops, fabricating plants, and mills, these hoists boast a 50% maximum operational time per hour for uniformly distributed work periods. They can efficiently handle up to 300 starts per hour. In scenarios of infrequent work periods, the hoist can operate for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings adhere to a 65% load factor, following ASME HST-1-2012 guidelines.

### Control System:


The Single Speed Electric Chain Hoist comes with a standard pendant control, designed with a length 4 feet less than the lifting height, ensuring easy operation from ground level. For added convenience, an optional wireless control is available.

## Advanced Braking System:

Our hoists feature an electromagnetic brake system, rigorously tested at 125% of the hoist capacity. This system is intelligently designed to engage automatically upon any loss of power, ensuring not only enhanced safety but also precise control over the operation of the hoist.

## Technical Specifications

<b>Rated Load Capacity</b>	1 ton	<b>Load Chain Type</b>	G100 Nickel
<b>Standard Lifting Height</b>	20 ft / 6 m	<b>Load Chain Size</b>	7.1 mm
<b>Speed (f/m) / min</b>	25.60 ft @60Hz 6.50 mt @50Hz	<b>Chain Falls</b>	1
<b>Number of Speeds</b>	1 Speed	<b>Chain Length</b>	20
<b>Voltage</b>	3 Phase 380V 50Hz	<b>Humidity</b>	20%~90%
<b>Total Power Watts</b>	2000	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Duty Class</b>	H4/M5/2m/Class D	<b>Trolley Power</b>	500
<b>IEC Motor Protection</b>	IP55	<b>Trolley Speed /min</b>	43.30 ft @60Hz 11 mt @50Hz
<b>Control</b>	Pendant Control IP66 and Optional Wireless	<b>Trolley Number of Speeds</b>	1
<b>Control Voltage</b>	24V	<b>Standards Compliance</b>	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-33
<b>Emergency Stop</b>	Yes	<b>Warranty</b>	3 Year
<b>Transmission / Reducer Type</b>	Spur gearbox		

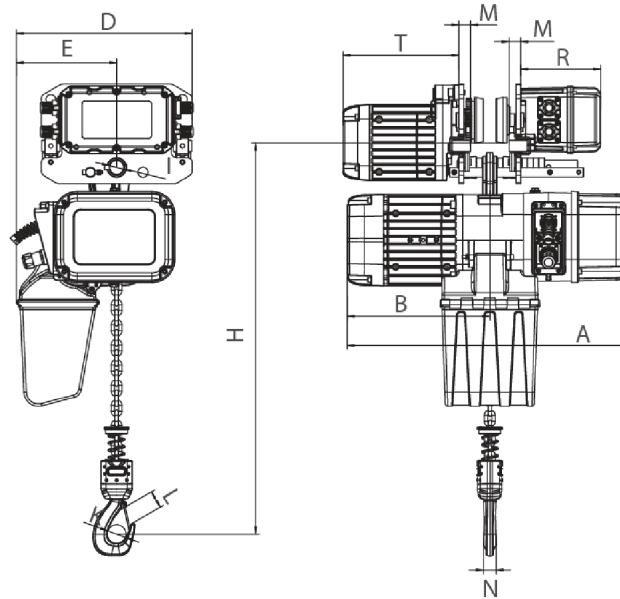

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
1	PWRXT1-01	473	440	3500-5500	285	210	20	105	140					
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167

## Unit Weight & Dimensions

H Minimum Headroom	516
W Width	330

## Packaging Weight & Dimensions

Package 1 Net Weight	101.64 lbs / 46 Kg
Package 2 Net Weight	62.48 lbs / 28 Kg

<b>A Total Height</b>	455	<b>Package 1 Gross Weight</b>	209 lbs / 95 Kg
<b>J Hook Opening</b>	42	<b>Package 2 Gross Weight</b>	70.4 lbs / 32 Kg
<b>D Depth</b>	590	<b>Package 1 Length</b>	26 in / 66.04 cm
<b>Total Weight (w/out cable or Chain)</b>	90	<b>Package 2 Length</b>	8 in / 20.32 cm
<b>Total Unit Weight</b>	164.12 lbs / 75 Kg	<b>Package 1 Width</b>	16 in / 40.64 cm
		<b>Package 2 Width</b>	13 in / 33.02 cm
		<b>Package 1 Height</b>	26 in / 66.04 cm
		<b>Package 2 Height</b>	20 in / 50.8 cm