


5 Tons Scrapper Winch Explosion Proof Manual Actuator

Key features

- **Load Capacity:** Capable of handling up to 5 tons, designed for heavy-duty scraping and lifting tasks.
- **Explosion Proof:** Engineered to be explosion-proof, suitable for use in hazardous environments where flammable gases or dust may be present.
- **Safety Features:** Includes safety mechanisms such as overload protection and manual operation controls to ensure secure and safe operation.
- **3 Year Warranty, Customer Support and Service in the USA**

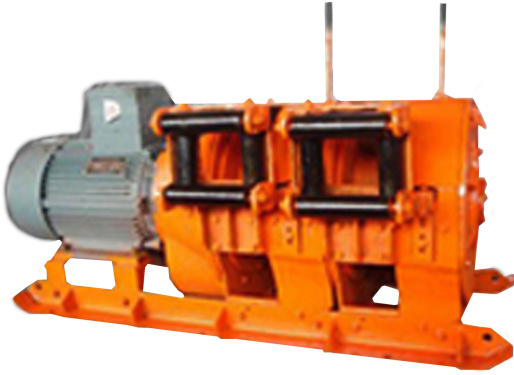

Winch Description

Ensure safe and reliable operation in hazardous environments with our 5-ton scrapper winch, featuring an explosion-proof manual actuator. Designed to handle tough tasks with precision, this winch combines robust construction with explosion-proof safety features, making it ideal for high-risk industrial applications. Its manual actuator provides dependable control, ensuring effective performance in challenging conditions while prioritizing operator safety and equipment longevity.

Prowinch Scrapper 5 Ton Winch

Our Scrapper Winches are designed to get the best price, quality and performance ratio, backed by a 3-year warranty. The key components of the equipment are constantly tested and improved through our internal design processes, based on continuous improvement, under ISO9001: 2015 certification.

Performance and Quality

Suitable for use in transporting crushed material resulting from mining, in underground locations, in horizontal areas or on inclined planes with up to 45° slope.

Components

Assembled with the best components on the market that guarantee optimal equipment operation. Two-drum electrical equipment, powered by an advanced technology control board.

Technical Specifications

| | | | |
|---------------------------------|-----------------------------------|--|----------------------|
| 1st Layer Rated Capacity | 5 ton | IEC Electric Control Box Protection | IP65 |
| Number of Speeds | 1 Speed - Optional Variable Speed | Control Voltage | 24V |
| Voltage | 3 Phase 380/440~480V 50/60Hz | Warranty | 3 Year |
| Motor Type (68) | Electric AC | Standard Lifting Height | Up to 492 ft / 150 m |
| IEC Motor Protection | IP55 | | |

Unit Weight & Dimensions

| | |
|--------------------------|--------------------|
| Total Unit Weight | 6174 lbs / 2802 Kg |
|--------------------------|--------------------|

Packaging Weight & Dimensions

| | |
|-------------------------------|--------------------|
| Package 1 Net Weight | 6174 lbs / 2801 Kg |
| Package 1 Width | 82 in / 208.28 cm |
| Package 1 Gross Weight | 5292 lbs / 2401 Kg |
| Package 1 Height | 34 in / 86.36 cm |
| Package 1 Length | 39 in / 99.06 cm |