



2200 lbs. 1 ton 10 ft Manual Chain Hoist G80 Black Tempered Chain

Key features

- **Lifting Capacity:** Supports loads up to 2200 lbs (1 ton), making it ideal for a wide range of lifting and pulling applications.
- **Lifting Height:** Provides a maximum lifting height of 10 feet, allowing flexibility in handling various loads.
- **Robust Construction:** Made from high-quality materials to withstand demanding conditions, ensuring long-lasting performance and durability.
- **3 Year Warranty, Customer Support and Service in the USA**

Manual Chain Hoist Description

The 2200 lbs (1 ton) Manual Chain Hoist is a robust and efficient lifting tool designed for medium to heavy-duty applications. With a lifting height of 10 feet and featuring a high-quality G80 black tempered chain, this hoist is perfect for a variety of lifting tasks across different environments.

Prowinch Manual Chain Hoist

All of our **Manual Chain Hoists** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.


Braking System

The reliable double pawl brake system is tested at 125% of the hoist capacity.

Technical Specifications

| | | | |
|--------------------------------|-------------------|-----------------------------|---|
| Rated Load Capacity | 2200 lb / 1000 kg | Load Chain Size | 5x11 mm |
| Standard Lifting Height | 10 ft / 3 m | Standards Compliance | ANSI/ASME B30.16, EN13157, ISO 16877-2008 |
| Load Chain Type | G80 | Warranty | 3 Year |

| Model/Modelo | PWTB050 | PWTB100 | PWTB150 | PWTB200 | PWTB300 | PWTB500 | PWTB1000 | PWTB2000 |
|--------------|-----------------|-----------------|------------------|--------------------|-----------------|------------------|------------------|------------------|
| A | 4.9 in / 124 mm | 5.3 in / 134 mm | 5.9 in / 149 mm | 6.2 in / 157 mm | | 7.1 in / 180 mm | | 8.9 in / 226 mm |
| B | 5.1 in / 129 mm | 6.1 in / 154 mm | 6.8 in / 172 mm | 7.3 in / 185.42 mm | 9.3 in / 236 mm | 10.3 in / 261 mm | 14.4 in / 365 mm | 21.7 in / 551 mm |
| C | 1.7 in / 43 mm | 2.0 in / 50 mm | 2.5 in / 63.5 mm | | 3.9 in / 99 mm | 5.0 in / 127 mm | 10.2 in / 259 mm | 11.3 in / 287 mm |
| D | 1.0 in / 25 mm | 1.2 in / 30 mm | 1.3 in / 33 mm | | 2.2 in / 55 mm | 2.9 in / 73 mm | 3.9 in / 99 mm | 4.8 in / 121 mm |
| E | 1.1 in / 27 mm | 1.3 in / 33 mm | | 1.5 in / 38 mm | 1.7 in / 43 mm | 2.0 in / 50 mm | 2.5 in / 63 mm | 3.2 in / 81 mm |
| F | 1.3 in / 33 mm | 1.6 in / 40 mm | 1.7 in / 43 mm | 1.8 in / 45 mm | 2.0 in / 50 mm | 2.4 in / 60 mm | 3.3 in / 83 mm | 4.3 in / 109 mm |
| G | 1.4 in / 35 mm | 1.8 in / 45 mm | 1.9 in / 48 mm | 2.0 in / 50 mm | 2.5 in / 63 mm | 3.1 in / 78 mm | | |

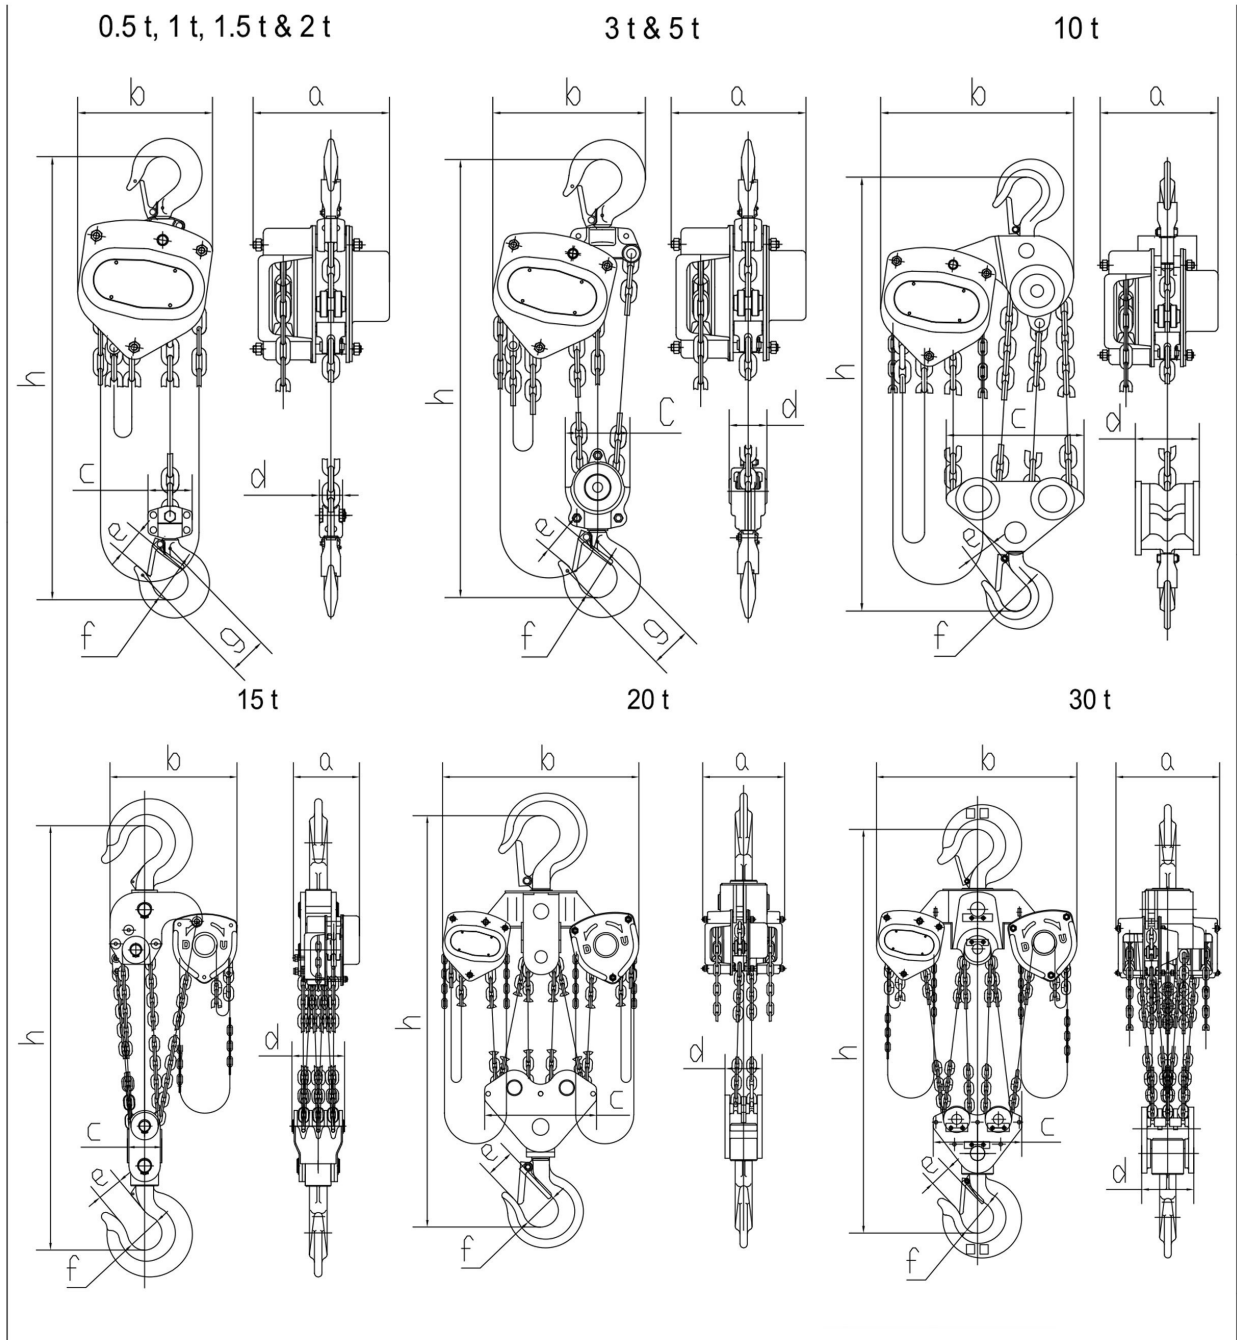

Unit Weight & Dimensions

| | |
|---------------------------|----------------|
| H Minimum Headroom | 1 ft / 0.3 m |
| Total Unit Weight | 26 lbs / 12 Kg |

Packaging Weight & Dimensions

| | |
|-------------------------------|-----------------|
| Package 1 Net Weight | 26 lbs / 12 Kg |
| Package 1 Width | 7 in / 17.78 cm |
| Package 1 Gross Weight | 26 lbs / 12 Kg |
| Package 1 Height | 10 in / 25.4 cm |
| Package 1 Length | 9 in / 22.86 cm |