



4400 lbs. 2 ton 20 ft Manual Chain Hoist G80 Black Tempered Chain

Key features

- **Lifting Capacity:** Supports loads up to 4400 lbs (2 tons), making it suitable for a wide range of lifting and pulling applications.
- **Lifting Height:** Provides a maximum lifting height of 20 feet, allowing flexibility for handling different loads.
- **Robust Construction:** Built from high-quality materials to withstand demanding conditions, ensuring long-lasting performance and durability.
- **3 Year Warranty, Customer Support and Service in the USA**

Manual Chain Hoist Description

The 4400 lbs (2 ton) Manual Chain Hoist is a robust and efficient lifting solution designed for medium to heavy-duty applications. With a generous lifting height of 20 feet and featuring a high-quality G80 black tempered chain, this hoist is ideal for various lifting tasks in diverse environments.

Prowinch Manual Chain Hoist

All of our **Manual Chain Hoists** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.


Braking System

The reliable double pawl brake system is tested at 125% of the hoist capacity.

Technical Specifications

Rated Load Capacity	4400 lb / 2000 kg	Load Chain Size	7x22 mm
Standard Lifting Height	20 ft / 6 m	Standards Compliance	ANSI/ASME B30.16, EN13157, ISO 16877-2008
Load Chain Type	G80	Warranty	3 Year

Model/Modelo	PWTB050	PWTB100	PWTB150	PWTB200	PWTB300	PWTB500	PWTB1000	PWTB2000
A	4.9 in / 124 mm	5.3 in / 134 mm	5.9 in / 149 mm	6.2 in / 157 mm		7.1 in / 180 mm		8.9 in / 226 mm
B	5.1 in / 129 mm	6.1 in / 154 mm	6.8 in / 172 mm	7.3 in / 185.42 mm	9.3 in / 236 mm	10.3 in / 261 mm	14.4 in / 365 mm	21.7 in / 551 mm
C	1.7 in / 43 mm	2.0 in / 50 mm	2.5 in / 63.5 mm	3.9 in / 99 mm	5.0 in / 127 mm	5.0 in / 127 mm	10.2 in / 259 mm	11.3 in / 287 mm
D	1.0 in / 25 mm	1.2 in / 30 mm	1.3 in / 33 mm	2.2 in / 55 mm	2.9 in / 73 mm	2.9 in / 73 mm	3.9 in / 99 mm	4.8 in / 121 mm
E	1.1 in / 27 mm	1.3 in / 33 mm	1.5 in / 38 mm	1.7 in / 43 mm	2.0 in / 50 mm	2.0 in / 50 mm	2.5 in / 63 mm	3.2 in / 81 mm
F	1.3 in / 33 mm	1.6 in / 40 mm	1.7 in / 43 mm	1.8 in / 45 mm	2.0 in / 50 mm	2.4 in / 60 mm	3.3 in / 83 mm	4.3 in / 109 mm
G	1.4 in / 35 mm	1.8 in / 45 mm	1.9 in / 48 mm	2.0 in / 50 mm	2.5 in / 63 mm	3.1 in / 78 mm		

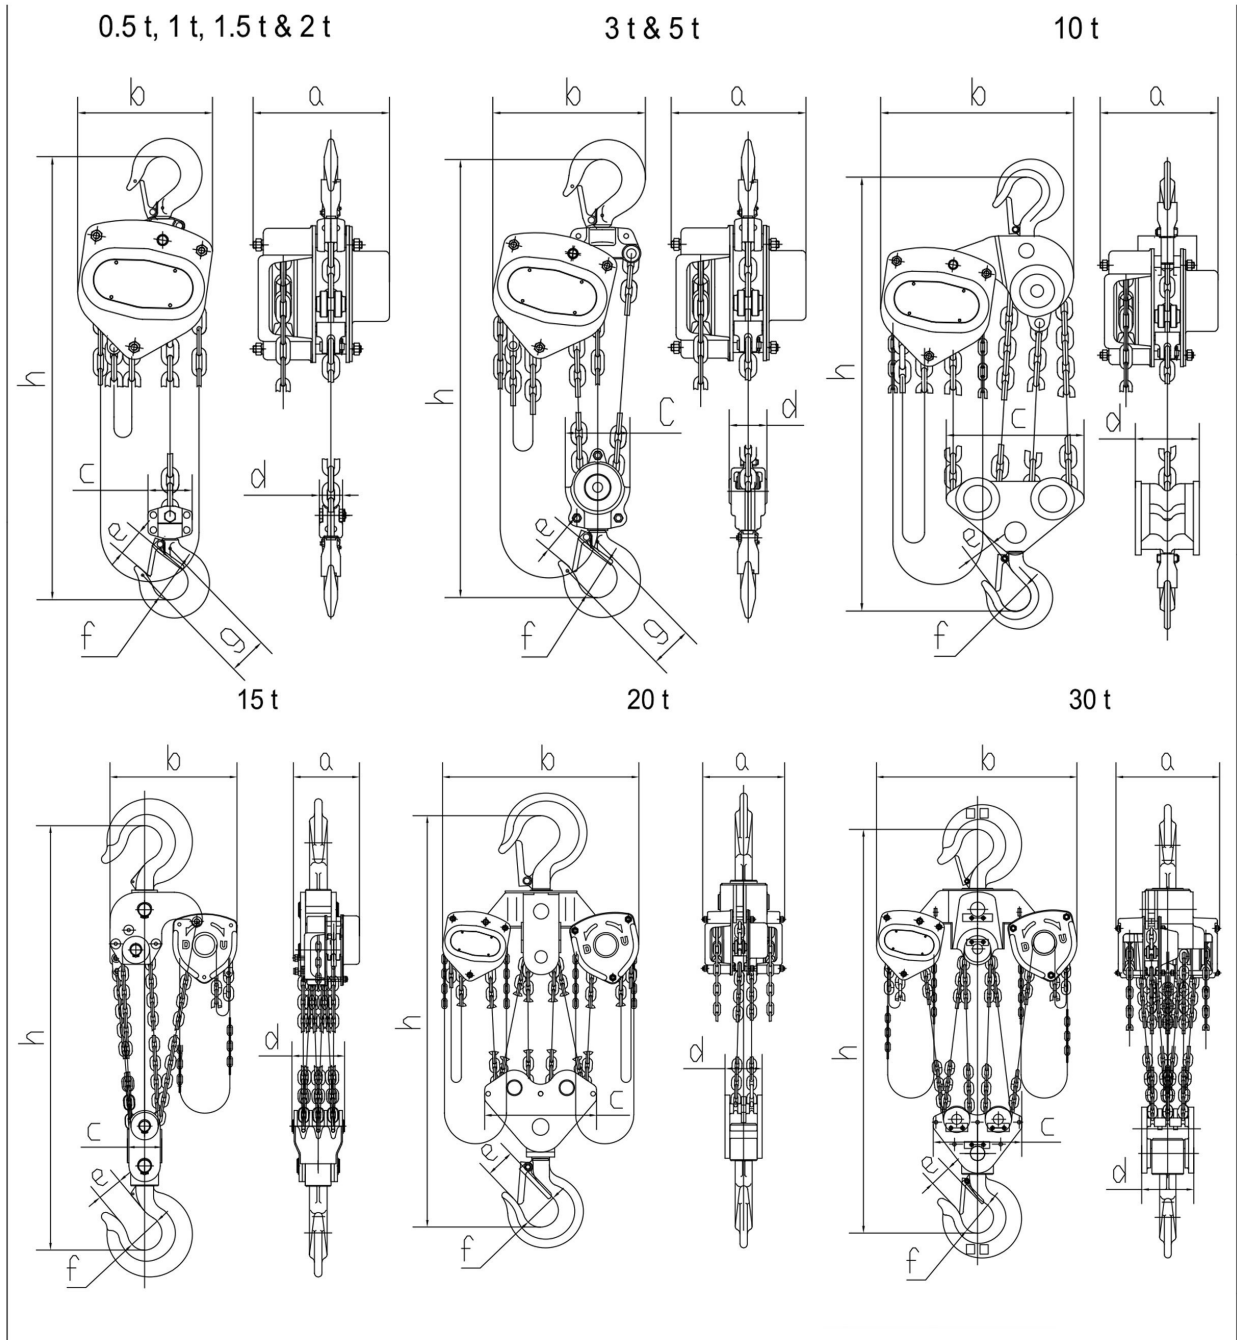

Unit Weight & Dimensions

H Minimum Headroom	1.5 ft / 0.4 m
Total Unit Weight	35 lbs / 16 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	35 lbs / 16 Kg
Package 1 Width	8 in / 20.32 cm
Package 1 Gross Weight	39 lbs / 18 Kg
Package 1 Height	11 in / 27.94 cm
Package 1 Length	12 in / 30.48 cm