


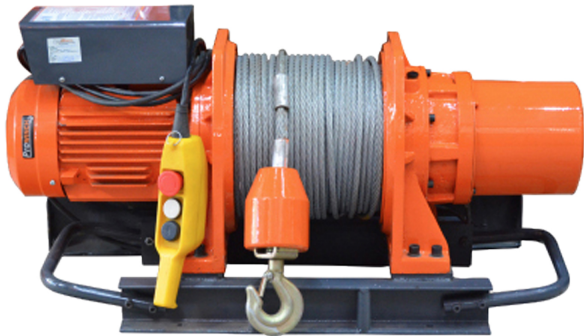

## 970 lbs. 440 Kg. Personnel Winch 4 Brakes Full Program Control Variable Speed

### Key features

- 3 Year Warranty, Customer Support and Service in the USA

970 lbs. 440 Kg. Personnel Winch 4 Brakes Full Program Control Variable Speed

## Technical Specifications

|                                   |                                                          |                             |                                                                                                                                                                 |
|-----------------------------------|----------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1st Layer Rated Capacity</b>   | 2600 lb / 1200 kg (Not Personnel)                        | <b>Dynamic Brake</b>        | Resistencia a VDF                                                                                                                                               |
| <b>Personnel Lifting Capacity</b> | 440 kg / 970 lbs                                         | <b>Control</b>              | Multifunction Programable Control Desk / Pupitre de Control Programable                                                                                         |
| <b>Speed /min</b>                 | 6~49 ft / 2~15 m                                         | <b>Control Voltage</b>      | 24 v                                                                                                                                                            |
| <b>Number of Speeds</b>           | Variable Speed                                           | <b>Reducer Brake</b>        | >125% (load lift capacity / capacidad de izaje de carga)                                                                                                        |
| <b>Voltage</b>                    | 3 Phase 208~240/440~480V 50/60Hz                         | <b>Drum Brake</b>           | >125% (load lift capacity / capacidad de izaje de carga)                                                                                                        |
| <b>Duty Class</b>                 | H4/M6/3m/Class D                                         | <b>Humidity</b>             | <85%                                                                                                                                                            |
| <b>Motor/Engine Power</b>         | 3 kW                                                     | <b>Temperature</b>          | -4 ~ 104° F / -20 ~ 40° C                                                                                                                                       |
| <b>Motor RPM</b>                  | 1440~1730                                                | <b>Noise Level</b>          | 85 db                                                                                                                                                           |
| <b>Motor Brake</b>                | >125% (load lift capacity / capacidad de izaje de carga) | <b>Standards Compliance</b> | ASMEB30.7 / B30.10/ B30.23/ ANSI-AWS D14.3/ RR-W-410E/ ISO2232,2006/95/CE, EN 61.800-5-1/ DIN VDE T 105, EN 60439-1/ VDE 0660, Part/Parte 500&EN 60146/VDE 0558 |
| <b>Insulation Grade</b>           | F                                                        | <b>Warranty</b>             | 3 Year                                                                                                                                                          |
| <b>IEC Motor Protection</b>       | Motor IP54 / Control Box IP65                            |                             |                                                                                                                                                                 |