



17500 lbs Electric Waterproof Winch Steel Rope 24V Wireless

Key features

- Max Pulling Capacity: Rated at 17,500 lbs, perfect for heavy-duty tasks such as vehicle recovery, off-road applications, and industrial lifting.
- 24V Power: Operates on a 24V DC system, providing increased power efficiency and performance, ideal for larger vehicles or demanding applications.
- Waterproof Construction: Designed to be waterproof, allowing reliable use in harsh weather conditions and wet environments.
- 3 Year Warranty, Customer Support and Service in the USA

Winch Description

This Prowinch 17,500 lbs 24V Electric Winch offers ultimate pulling power. The winch is IP67 waterproof and comes with a handy wireless control, which make it perfect for a wide variety of uses such as off-roading and towing.

Prowinch 24V Electric Winch

All of our **AC electric winches** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Key Components

All internal components have been upgraded to meet the highest quality standards. Final assembly and all tests are performed locally at Prowinch facility before shipping to ensure that every unit meets the corresponding standard.

Control System


These winches feature a unique remote control design, which allows the winch to be operated wired or wirelessly.

Braking System


Automatic brake system designed to automatically engage immediately upon any loss of power.

Technical Specifications

| | | | |
|---------------------------------|-----------------------|------------------------------------|---|
| 1st Layer Rated Capacity | 17500 lbs | Control Voltage | 24 V |
| Number of Layers | 4 | Electric Control Box | Reverse Solenoid Control Box |
| Speed (f/m) / min | 3.2~23 ft / 0.9~7 m | Transmission / Reducer Type | 3-Stage Planetary |
| Number of Speeds | 1 Speed | Gear Ratio | 460:1 |
| Voltage | Battery Power 24 VDC | Drum Brake | Automatic |
| FCC ID | 2ASYP-DW12K | Free Spooling Clutch Type | Sliding Ring Gear |
| Motor Type (68) | DC Series Wound Motor | Wire Rope | Steel ϕ 29/64 in x 92 ft ϕ 11.5 mm x 28 m |
| Motor AMP | 335 AMP | Fairlead | Included |
| IEC Motor Protection | IP67 | Accessories | Control and Installation Hardware |
| Control | Wireless and Wired | Warranty | 3 Year |

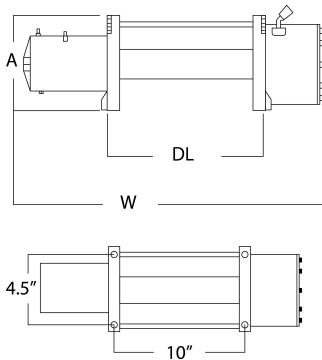

INCLUDED / INCLUIDO

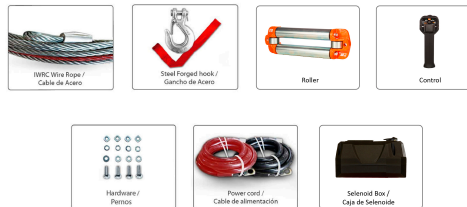

OPTIONAL / OPCIONAL



Dimensions in mm / Dimensiones en mm

Unit Weight & Dimensions

| | | | |
|-------------------------------------|-----------------|-------------------------------|------------------|
| A Total Height | 271 mm | Package 1 Net Weight | 118 lbs / 54 Kg |
| Drum BD Barrel Diameter (58) | 89 mm | Package 1 Width | 14 in / 35.56 cm |
| W Width | 566 mm | Package 1 Gross Weight | 121 lbs / 55 Kg |
| Drum DL Length (56) | 228 mm | Package 1 Height | 14 in / 35.56 cm |
| Total Unit Weight | 118 lbs / 54 Kg | Package 1 Length | 25 in / 63.5 cm |

Packaging Weight & Dimensions