

3t Underhang End Truck Set 8m Span Gear motors 0.4kw Control Schneider Inverter

Key features



- 3 Year Warranty, Customer Support and Service in the USA

3t Underhang End Truck Set 8m Span Gear motors 0.4kw Control Schneider Inverter

Technical Specifications

Warranty

3 Year

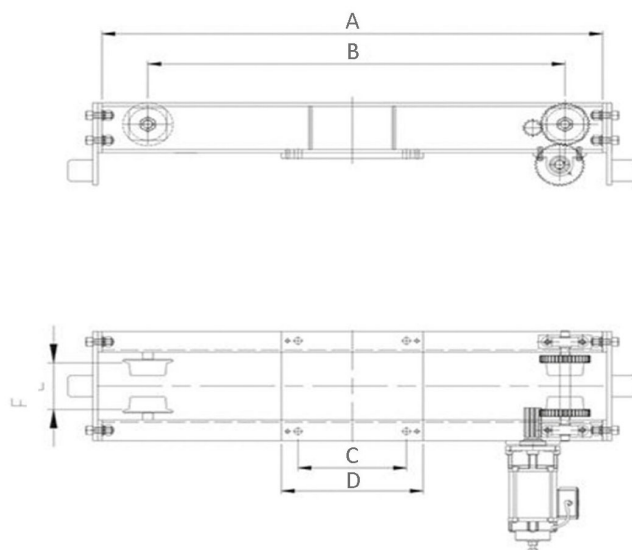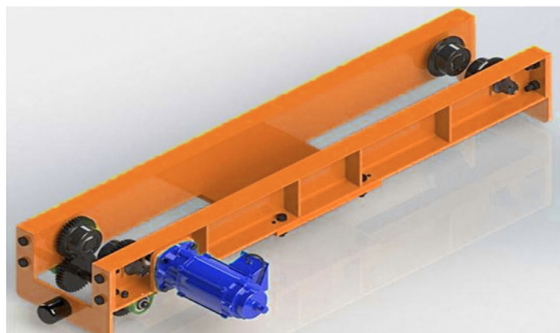

Suspension end carriage drive by gear motor, advocate material by hot-rolled steel, bridge on the tooth and bilateral wheel driving, simple structure, light weight, space utilization rate is high, running smooth and noise low. It's good partner of suspension crane manufacturing.

Impulsión del carro del extremo de la suspensión por motorreductor, material de defensa por acero laminado en caliente, puente en el diente y bilateral manejo de la rueda, estructura simple, peso ligero, la tasa de utilización del espacio es alta, funciona sin problemas y el ruido es bajo. Es bueno socio de fabricación de grúas de suspensión.

End Carriage Model / Modelo de Carro Final	Application of Crane Model / Aplicación del Modelo de Grúa	Motor	Wheel / Rueda	Traveling Speed (per min) / Velocidad de desplazamiento (por min)	A	B	C	D	E
TX2-12	1 t / 2t - 7.5 m	0.3kW*2	90*8	52.4 ft 16 m	47.2 in / 1200 mm	39.3 in / 1000 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX2-15	1 t / 2t - 11.5 m	0.3kW*2	90*8	52.4 ft 16 m	59 in / 1500 mm	51.1 in / 1300 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX2-18	1 t / 2t - 16.5 m	0.3kW*2	90*8	52.4 ft 16 m	70.8 in / 1800 mm	62.9 in / 1600 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX5-15	3 t / 5t - 7.5 m	0.4kW*2	120*8	52.4 ft 16 m	59 in / 1500 mm	47.2 in / 1200 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm
TX5-18	3 t / 5t - 11.5 m	0.4kW*2	120*8	52.4 ft 16 m	70.8 in / 1800 mm	59 in / 1500 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm
TX5-22	3 t / 5t - 16.5 m	0.4kW*2	120*8	52.4 ft 16 m	86.6 in / 2200 mm	86.6 in / 2200 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm

Whole set end carriage includes wheels, gear motor, connect plat bolts and rubber buffers

Todo el conjunto del carro final incluye ruedas, motorreductor, pernos de conexión y amortiguadores de goma