



End Truck Low Headroom 3t / 5t up to 11.5m Span. W dia. 120mm 0.4KW x 2 Three Phase

Key features




- Load Capacity: Available in options for 3 tons or 5 tons, providing flexibility based on lifting needs.
- Powerful Motors: Equipped with 0.4 kW motors (x2) to provide reliable performance and effective lifting capabilities.
- Durable Construction: Built from high-quality materials for durability and long-lasting performance in demanding conditions.
- 3 Year Warranty, Customer Support and Service in the USA

The Low Headroom End Truck Description

The Low Headroom End Truck is designed for efficient operation in spaces with limited overhead clearance. Suitable for loads up to 3 tons or 5 tons, this end truck accommodates spans of up to 11.5 meters, making it an excellent choice for a variety of industrial applications.

Technical Specifications

Warranty	3 Year
----------	--------

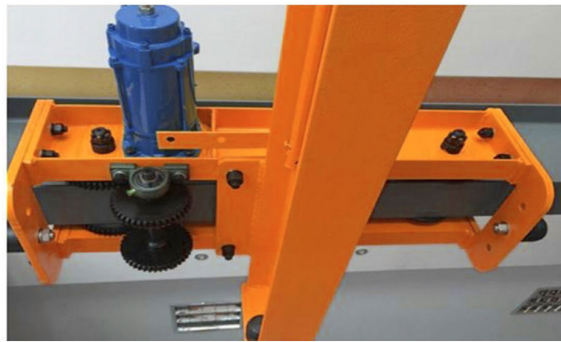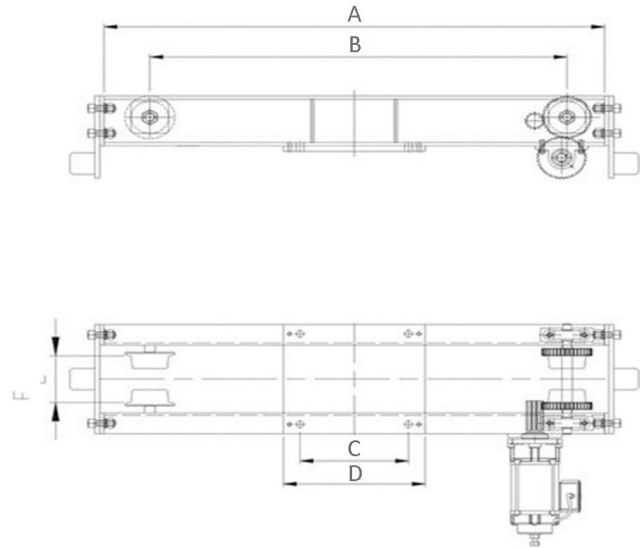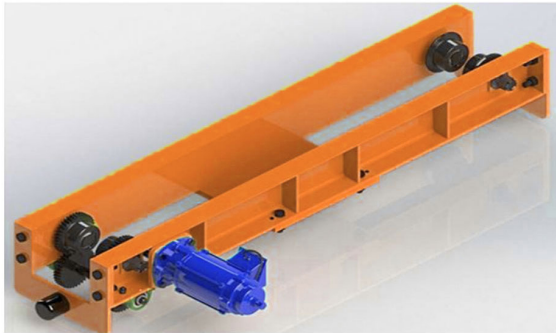

Suspension end carriage drive by gear motor, advocate material by hot-rolled steel, bridge on the tooth and bilateral wheel driving, simple structure, light weight, space utilization rate is high, running smooth and noise low. It's good partner of suspension crane manufacturing.

Testeras motorizadas suspendidas, material de acero laminado en caliente, rueda conductora bilateral para el puente, estructura simple, peso ligero, alta proporción de utilización de espacio, marcha suave y silenciosa.

End Carriage Model / Modelo de Carro Final	Application of Crane Model / Aplicación del Modelo de Grúa	Motor	Wheel / Rueda	Traveling Speed (per min) / Velocidad de desplazamiento (por min)	A	B	C	D	E
TX2-12	1 t / 2t - 7.5 m	0.3kW*2	90*8	52.4 ft 16 m	47.2 in / 1200 mm	39.3 in / 1000 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX2-15	1 t / 2t - 11.5 m	0.3kW*2	90*8	52.4 ft 16 m	59 in / 1500 mm	51.1 in / 1300 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX2-18	1 t / 2t - 16.5 m	0.3kW*2	90*8	52.4 ft 16 m	70.8 in / 1800 mm	62.9 in / 1600 mm	10.2 in / 260 mm	13.3 in / 340 mm	4.3-5.1 in / 110-130 mm
TX5-15	3 t / 5t - 7.5 m	0.4kW*2	120*8	52.4 ft 16 m	59 in / 1500 mm	47.2 in / 1200 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm
TX5-18	3 t / 5t - 11.5 m	0.4kW*2	120*8	52.4 ft 16 m	70.8 in / 1800 mm	59 in / 1500 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm
TX5-22	3 t / 5t - 16.5 m	0.4kW*2	120*8	52.4 ft 16 m	86.6 in / 2200 mm	86.6 in / 2200 mm	14 in / 360 mm	22.8 in / 580 mm	4.8-5.5 in / 122-142 mm

Whole set end carriage includes wheels, gear motor, connect plat bolts and rubber buffers

Todo el conjunto del carro final incluye ruedas, motorreductor, pernos de conexión y amortiguadores de goma