



13500 lb Load Capacity Electric Winch Waterproof with Wireless Remote Control System 24V

Key features

- What you need: The high-quality automotive wire is the perfect option for you to ensure you will not get stuck on your offroad experience. With a powerful 13,500 lb line traction and 24V DC engine, it develops 6.6 hp traction for you to get out of any situation
- Smooth and efficient: The winch cable is retracted by a permanent magnet motor with low amperage. The 3-stage planetary gearbox with a gear ratio of 250:1 will ensure that the electric winch will have an easy, smooth and efficient recovery movement
- Waterproof materials: One of the best parts about our off-roading accessories is that it comes with IP67 waterproof protection, so you don't need to worry if you are caught out by heavy rain
- 3 Year Warranty, Customer Support and Service in the USA

Electric Winch Description

This Prowinch **13,500 lbs 24V Electric Winch** offers ultimate pulling power in a compact size. The winch is IP67 waterproof and comes with a handy wireless control, which make it perfect for a wide variety of environments and applications.

Prowinch 24V Electric Winch

All of our **DC electric winches** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Key Components

All internal components have been upgraded to meet the highest quality standards. Final assembly and all tests are performed locally at Prowinch facility before shipping to ensure that every unit meets the corresponding standard.

Control System


These winches feature a unique remote control design, which allows the winch to be operated wired or wirelessly.

Braking System

Automatic brake system designed to automatically engage immediately upon any loss of power.


Technical Specifications

| | | | |
|--|-----------------------|------------------------------------|--|
| 1st Layer Rated Capacity | 13500 lbs | Motor AMP | 433 AMP |
| Speed /min | 3~25 ft / 0.9~8 m | IEC Motor Protection | IP67 |
| Number of Speeds | 1 Speed | Control | Wireless and Wired |
| Wire rope capacity per layer first/last | 13,500 / 6,770 lbs | Transmission / Reducer Type | 3-Stage Planetary |
| Voltage | Battery Power 24 VDC | Gear Ratio | 250:1 |
| FCC ID | 2ASYP-DW12K | Drum Brake | Automatic |
| Duty Class | Recovery / Rescate | Free Spooling Clutch Type | Sliding Ring Gear |
| Motor/Engine Type | DC Series Wound Motor | Wire Rope | Steel $\phi 3/8$ in x 85 ft $\phi 9.5$ mm x 26 m |
| Motor/Engine Power | 6.6 HP | Warranty | 3 Year |

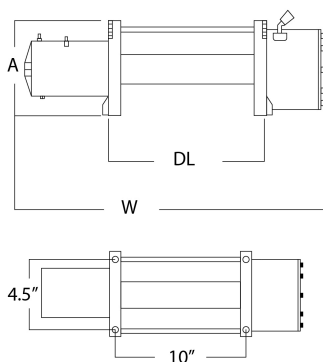

Dimensions in mm / Dimensiones en mm

INCLUDED / INCLUIDO

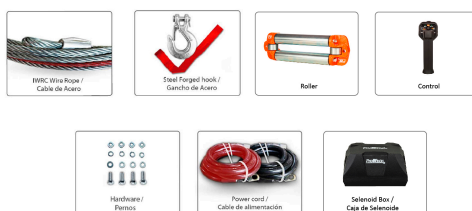

OPTIONAL / OPCIONAL



Unit Weight & Dimensions

| | | | |
|---------------------------|----------------|-------------------------------|------------------|
| A Total Height | 188 mm | Package 1 Net Weight | 63 lbs / 29 Kg |
| BD Barrel Diameter | 64 mm | Package 1 Width | 11 in / 27.94 cm |
| W Width | 563 mm | Package 1 Gross Weight | 70 lbs / 32 Kg |
| DL Drum Length | 224 mm | Package 1 Height | 11 in / 27.94 cm |
| Total Unit Weight | 63 lbs / 29 Kg | Package 1 Length | 24 in / 60.96 cm |

Packaging Weight & Dimensions