



## 13500 lbs Electric Waterproof Winch Synthetic Rope Aluminum Wireless

### Key features

- Load Capacity: 13,500 lbs, suitable for heavy-duty applications including vehicle recovery, off-road use, and industrial tasks.
- Synthetic Rope: Equipped with a high-strength synthetic rope, which is lighter, safer, and easier to handle compared to steel cable, reducing recoil and improving safety.
- Waterproof Design: Built to be waterproof, ensuring reliable operation in wet or harsh environments and extending the winch's operational life.
- 3 Year Warranty, Customer Support and Service in the USA

### Winch Description

This Prowinch 13,500 lbs 12V Electric Winch with synthetic rope offers powerful performance at an attractive price. The built in wireless control allows for more freedom of movement. The IP67 rating makes it great for use in the garage or outside.

### Prowinch AC Electric Winch

All of our **AC electric winches** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

### Key Components

All internal components have been upgraded to meet the highest quality standards. Final assembly and all tests are performed locally at Prowinch facility before shipping to ensure that every unit meets the corresponding standard.

### Control System


These winches feature a unique remote control design, which allows the winch to be operated wired or wirelessly.

### Braking System

Automatic brake system designed to automatically engage immediately upon any loss of power.


## Technical Specifications

<b>1st Layer Rated Capacity</b>	13500 lbs	<b>Control Voltage</b>	12 V
<b>Number of Layers</b>	4	<b>Electric Control Box</b>	Reverse Solenoid Control Box
<b>Speed (f/m) / min</b>	3~25 ft / 0.9~8 m	<b>Transmission / Reducer Type</b>	3-Stage Planetary
<b>Number of Speeds</b>	1 Speed	<b>Gear Ratio</b>	250:1
<b>Voltage</b>	Battery Power 12 VDC	<b>Drum Brake</b>	Automatic
<b>FCC ID</b>	2ASYP-DW12K	<b>Free Spooling Clutch Type</b>	Sliding Ring Gear
<b>Motor Type (68)</b>	DC Series Wound Motor	<b>Wire Rope</b>	Synthetic 7/16 In 85 ft / 11 mm x 26 m up to 23000 lbs
<b>Motor AMP</b>	433 AMP	<b>Fairlead</b>	Included
<b>IEC Motor Protection</b>	IP67	<b>Accessories</b>	Control and Installation Hardware
<b>Control</b>	Wireless and Wired	<b>Warranty</b>	3 Year

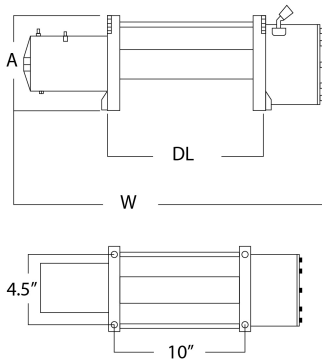

Dimensions in mm / Dimensiones en mm

### INCLUDED / INCLUIDO

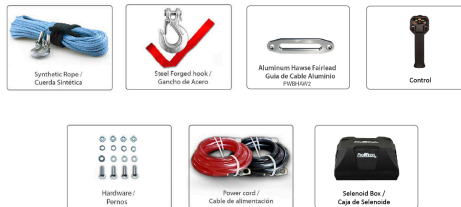

### OPTIONAL / OPCIONAL



## Unit Weight & Dimensions

<b>A Total Height</b>	188 mm	<b>Package 1 Net Weight</b>	62 lbs / 28 Kg
<b>Drum BD Barrel Diameter (58)</b>	64 mm	<b>Package 1 Width</b>	13 in / 33.02 cm
<b>W Width</b>	563 mm	<b>Package 1 Gross Weight</b>	61 lbs / 28 Kg
<b>Drum DL Length (56)</b>	224 mm	<b>Package 1 Height</b>	11 in / 27.94 cm
<b>Total Unit Weight</b>	62 lbs / 29 Kg	<b>Package 1 Length</b>	24 in / 60.96 cm

## Packaging Weight & Dimensions