



Radio Remote Control 6 Channels 1 Speed 110-480V Range 300 ft


Key features

- 200 Auto Channels replacing traditional single channel quartz plus 1 Million ID Codes.
- Easy Pairing System, no need of software or copier to add or replace lost or broken Transmitter
- Customizable 200 Functions settings to meet any special requirements
- Reinforced fiber plastic case for Transmitter and Receiver plus rubber protector for Transmitter
- 3 Year Warranty, Customer Support and Service in the USA

Prowinch's OEM Industrial Wireless Control System has been specially designed to meet all the latest requirements in the industry and also based on our customer's feedback. Beside having all the professional and usual functions and setups our new line offers simplicity to everyday needs. Now adding a second transmitter, replacing transmitters, joining twin units or other customizable setups are easier than ever, no need to get hard to find quartz to match frequencies or need of software or copiers to pair transmitters and receivers. Pairing can be made from the same transmitter even if you lost the original or you have no information of the current frequency and code, all with the highest security to avoid unwanted pairing or interference from other devices.

Technical Specifications

FCC ID	2AZMK-Q1212	Safety Code	200 Millions
Buttons	6	Transmitter Power	≤10dBm
Transmitter Power Supply	2 AA batteries	Wireless Frequency Range	433/480 MHz
Material	PA6 30% GF	IEC Motor Protection	IP65
Receiver Power Supply	AC 110V-480V	Emergency Stop	YES
Receiver Sensitivity	dBm -112	Operating Temperature Range	-40 ~ 185 °F / -40 ~ 85°C
Control Distance	300 ft / 100 mt	Warranty	3 Year

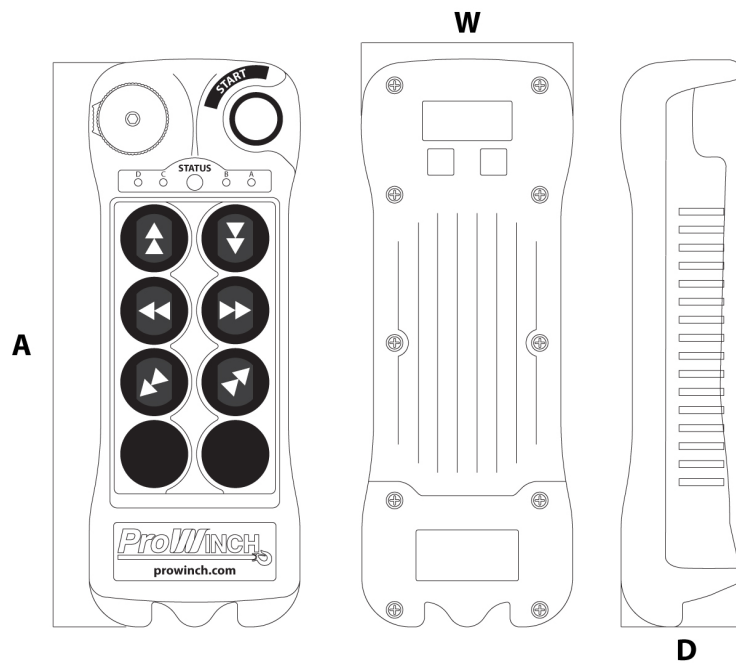

Unit Weight & Dimensions

A Total Height	7
W Width	2.7
D Depth	1.2
Total Unit Weight	5 lbs / 3 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	5 lbs / 2 Kg
Package 1 Width	10 in / 25.4 cm
Package 1 Gross Weight	4 lbs / 2 Kg
Package 1 Height	4 in / 10.16 cm
Package 1 Length	12 in / 30.48 cm