



## Radio Remote Control 6 Channels 2 Speed Multi voltage Range 300 ft

### Key features


- 200 Auto Channels replacing traditional single channel quartz plus 1 Million ID Codes.
- Easy Pairing System, no need of software or copier to add or replace lost or broken Transmitter
- Customizable 200 Functions settings to meet any special requirements
- 3 Year Warranty, Customer Support and Service in the USA

### Radio Remote Control Description

The Radio Remote Control with 6 channels and 2-speed functionality is designed for versatile management of industrial equipment. With a range of up to 300 feet and multi-voltage compatibility, this remote control ensures efficient and reliable operation across various applications.

## Technical Specifications

<b>FCC ID</b>	2AZMK-Q1212	<b>Safety Code</b>	200 Millions
<b>Buttons</b>	6	<b>Transmitter Power</b>	≤10dBm
<b>Transmitter Power Supply</b>	2 AA batteries	<b>Wireless Frequency Range</b>	433/480 MHz
<b>Material</b>	PA6 30% GF	<b>IEC Motor Protection</b>	IP65
<b>Receiver Power Supply</b>	AC/DC110V-480V	<b>Emergency Stop</b>	YES
<b>Receiver Sensitivity</b>	dBm -112	<b>Operating Temperature Range</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Control Distance</b>	300 ft / 100 mt	<b>Warranty</b>	3 Year

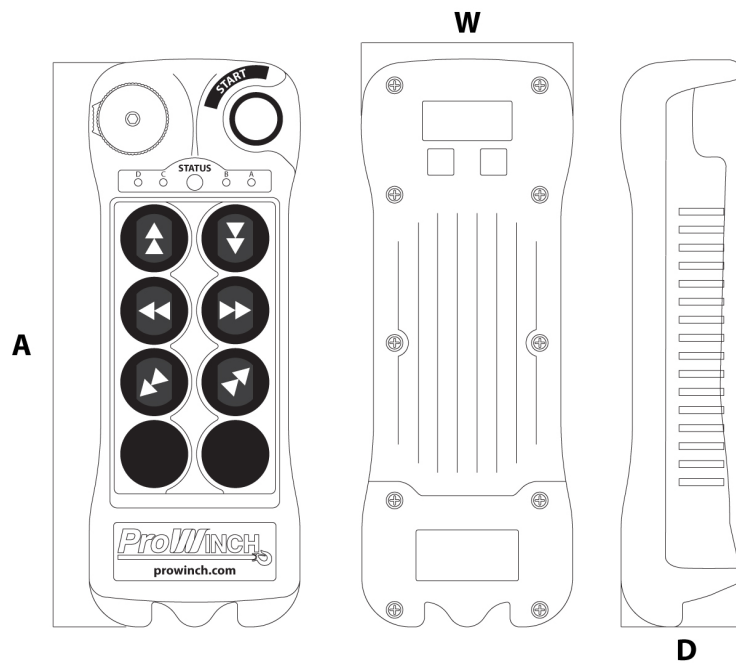

## Unit Weight & Dimensions

<b>A Total Height</b>	7
<b>W Width</b>	2.7
<b>D Depth</b>	1.2
<b>Total Unit Weight</b>	5 lbs / 3 Kg

## Packaging Weight & Dimensions

<b>Package 1 Net Weight</b>	5 lbs / 2 Kg
<b>Package 1 Width</b>	10 in / 25.4 cm
<b>Package 1 Gross Weight</b>	4 lbs / 2 Kg
<b>Package 1 Height</b>	4 in / 10.16 cm
<b>Package 1 Length</b>	12 in / 30.48 cm