



2 Ton Electric Chain Hoist 20 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

This **Wireless 1 Speed 20 ft 2 ton Electric Chain Hoist** allows you to easily lift loads with the push of a button. The hoist is powered by a three-phase electrical connection, and the heavy duty motor makes it perfect for use in industrial environments.

Technical Specifications

Rated Load Capacity	4400 lbs / 2000 kg	Control Voltage	12V
Standard Lifting Height	20 ft / 6 m	Emergency Stop	Yes
Speed /min	2.5 m/min	Load Chain Type	G80 JAPAN
Number of Speeds	1 Speed	Chain Falls	1
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Length	20 ft / 6 m
FCC ID	2AZMK-Q1212	Humidity	<85%
Duty Class	H4/M5/2m/Class D	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor/Engine Power	3 KW	Noise Level	81 dB
Motor Brake	Yes	Standards Compliance	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
Insulation Grade	F	UL File	MSXT.E528915 - Hoists
IEC Motor Protection	IP55	Warranty	3 Year
Control	Wireless F21-4 and Pendant Control		

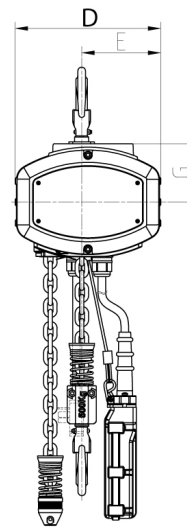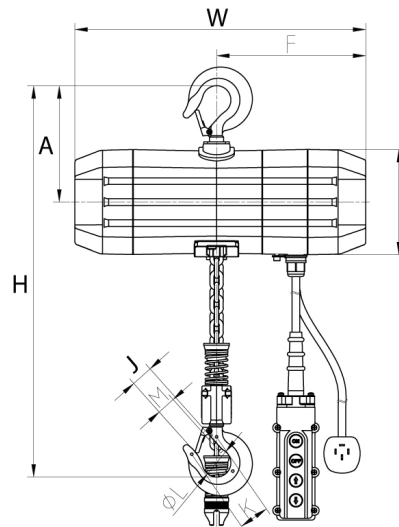

Unit Weight & Dimensions

W Width	27.5 in / 69.4 cm	Package 1 Net Weight	177 lbs / 80 Kg
J Hook Opening	1.53 in / 3.9 cm	Package 1 Width	25 in / 63.5 cm
Total Unit Weight	177 lbs / 81 Kg	Package 1 Gross Weight	221 lbs / 100 Kg
		Package 1 Height	20 in / 50.8 cm
		Package 1 Length	25 in / 63.5 cm

Packaging Weight & Dimensions