



5 Ton Electric Chain Hoist 30 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

This **Wireless 1 Speed 5 ton Electric Chain Hoist** has a 30 foot lifting height and allows you to lift heavy loads with the push of a button to complete even the toughest jobs with ease. The three-phase electrical connection and heavy duty motor make it perfect for use in industrial environments.

Technical Specifications

Rated Load Capacity	11000 lbs / 5000 kg	Emergency Stop	Yes
Standard Lifting Height	30 ft / 9 m	Load Chain Type	G80 JAPAN
Number of Speeds	1 Speed	Load Chain Size	11.2x34mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Falls	2
FCC ID	2AZMK-Q1212	Chain Length	60 ft / 18 m
Duty Class	H4/M5/2m/Class D	Humidity	<85%
Motor/Engine Power	3 KW	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor Brake	Yes	Noise Level	81 dB
Insulation Grade	F	Standards Compliance	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
IEC Motor Protection	IP55	UL File	MSXT.E528915 - Hoists
Control	Wireless F21-4 and Pendant Control	Warranty	3 Year
Control Voltage	12V		

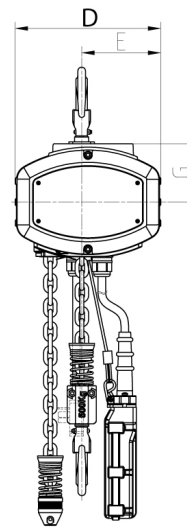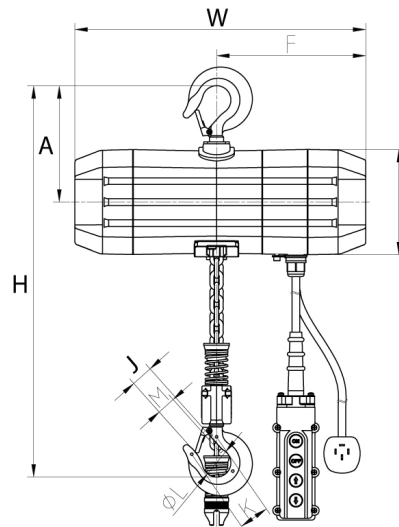

Unit Weight & Dimensions

W Width	27.5 in / 69.4 cm
J Hook Opening	2.72 in / 6.9 cm
Total Unit Weight	321 lbs / 146 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	321 lbs / 146 Kg
-----------------------------	------------------