

10 Ton 2 Speed Power Trolley 220/460V 60HZ with Limit Switches Pendant not Included

Key features


- US and EC Standards ASME HST-1 , ASME B30.17 , EN14492-2 , EN60204-32
- Heavy Duty I-beam Electric Trolley for secure movement along beams
- German-engineered Schneider UL Listed contactors, All ways Limit Switches, Emergency Stop
- Durable construction for long-term reliability and performance, Compatible S-beam and W-beam
- 3 Year Warranty, Customer Support and Service in the USA

10 Ton 2 Speed Power Trolley Description

The 10 Ton 2-Speed Power Trolley is engineered for heavy-duty industrial applications, offering exceptional lifting capabilities. Operating on 230/460V, 60HZ power, this trolley features dual-speed control for precise load handling and increased efficiency. Built-in limit switches enhance safety by preventing over-travel during operation. The pendant control is sold separately, allowing for flexibility to meet your specific operational needs.

Technical Specifications

Rated Load Capacity	22000 lb / 10000 kg	Trolley Speed /min	36 - 68 ft /11 - 21 m
Voltage	3 Phase 208~240/440~480V 50/60Hz	Warranty	3 Year

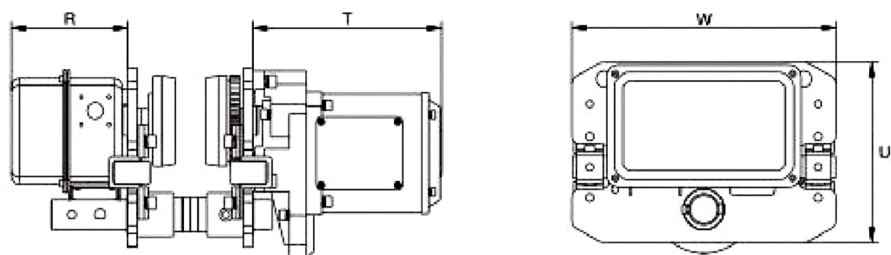

Model / Modelo	PWQE1Ti	PWQE2Ti	PWQE3Ti	PWQE5Ti	PWQE7Ti	PWQE10Ti	
Dimensions / Dimensiones	W	12.4 in / 315mm	12.7 / 325mm	13.3in / 340mm	15.7 in/ 400mm	26.5 in / 670 mm	19.6in / 500mm
	U	8.3 in / 212mm	8.6mm / 220mm	9.8 in / 250mm	11.4 in / 291mm	-	14.6in / 371mm
	R	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	9 in / 231 mm	5.5 in / 142mm
	T	9 in / 231mm	9 in / 231mm	9 in / 231mm	9 in / 231mm	5.6 in / 142 mm	9 in / 231mm

Unit Weight & Dimensions

Total Unit Weight	286 lbs / 130 Kg
--------------------------	------------------

Packaging Weight & Dimensions

Package 1 Net Weight	286 lbs / 130 Kg
Package 1 Width	21 in / 53.34 cm
Package 1 Gross Weight	319 lbs / 145 Kg
Package 1 Height	21 in / 53.34 cm
Package 1 Length	29 in / 73.66 cm