



## 6600 lbs. 3 Ton. 30 ft Lift Height 2 speed Electric Chain Hoist Power Trolley FEC Japan Chain M5/H4

### Key features

- Quality is inside: Heavy Duty H4/M5. Aluminum housing, NSK Bearings, USA Chevron Meropa 320 Lub
- US Brand EATON Contactors, All ways Limit Switches, Emergency Stop
- Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- US and EC Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

This **3 ton Two-Speed Electric Chain Hoist with Power Trolley** has an M5 duty cycle and allows you to easily lift and travel loads with the push of a button. The hoist is powered by a three-phase electrical connection, and the heavy duty motor and included electric trolley make it perfect for use in industrial environments.

### Prowinch Two Speed Electric Chain Hoist with Power Trolley

All of our Electric Chain Hoists are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

### Key Components

All internal components have been upgraded to meet the highest quality standards. Key electronic components are produced by American or German brands, and we use American-made lubricants to ensure the lifespan of gears and reducers. Final assembly and all tests are performed in the US before shipping to ensure that every unit meets the corresponding standard.

### Duty Classification

Duty Classification is a key factor when choosing the right unit. These H4 hoists are suitable for high-volume handling in steel warehouses, machine shops, fabricating plants and mills, and foundries. For uniformly distributed work periods, the hoists have 50% max. operational time per hour and can handle up to 300 starts per hour. When being used for infrequent work periods, the hoist can be operated for 30 minutes from a cold start with up to 300 starts per hour. Operational time ratings are calculated at a 65% load factor, as per ASME HST-1-2012.

### Control System


This electric chain hoist comes standard with a pendant control. The length of the control is 4 feet less than the lifting height, which allows it to be easily operated from ground-level. An optional wireless control is available for extra convenience.

### Braking System

The electromagnetic brake system is tested at 125% of the hoist capacity and is designed to automatically engage immediately upon any loss of power.

## Technical Specifications

<b>Rated Load Capacity</b>	6600 lb / 3000 kg	<b>Contactors</b>	EATON 25 AMP
<b>Standard Lifting Height</b>	30 ft / 9 m	<b>Transmission / Reducer Type</b>	Spur gearbox with Oil splash lubrication
<b>Speed /min</b>	7 & 21 ft / 2.1 & 6.4 m	<b>Load Chain Type</b>	G80 JAPAN or G100
<b>Number of Speeds</b>	2 Speed	<b>Load Chain Size</b>	11.2 x 34 mm
<b>Voltage</b>	3 Phase 208~240/440~480V 50/60Hz	<b>Chain Falls</b>	1
<b>FCC ID</b>	WTX20X04015023E	<b>Chain Length</b>	30 ft / 9 m
<b>Duty Class</b>	H4/M5/2m/Class D	<b>Humidity</b>	<85%
<b>Motor/Engine Power</b>	3 kW	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Motor AMP</b>	10 / 5	<b>Trolley Power</b>	0.8 kW
<b>Motor Brake</b>	Yes DC Electromagnetic	<b>Noise Level</b>	81 dB
<b>Insulation Grade</b>	F	<b>Trolley Speed /min</b>	36 - 68 ft /11 - 21 m
<b>IEC Motor Protection</b>	IP55	<b>Trolley Number of Speeds</b>	2
<b>Variable Frequency Driver</b>	VFD Hitachi HS300-040H	<b>I-Beam Width Range</b>	100-178 mm
<b>Dynamic Brake</b>	Yes	<b>Minimum Turn Radius</b>	3.3 ft / 1 m
<b>Control</b>	Pendant Control and Optional Wireless	<b>Standards Compliance</b>	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-32
<b>Control Voltage</b>	24V	<b>Warranty</b>	3 Year
<b>Emergency Stop</b>	Yes		

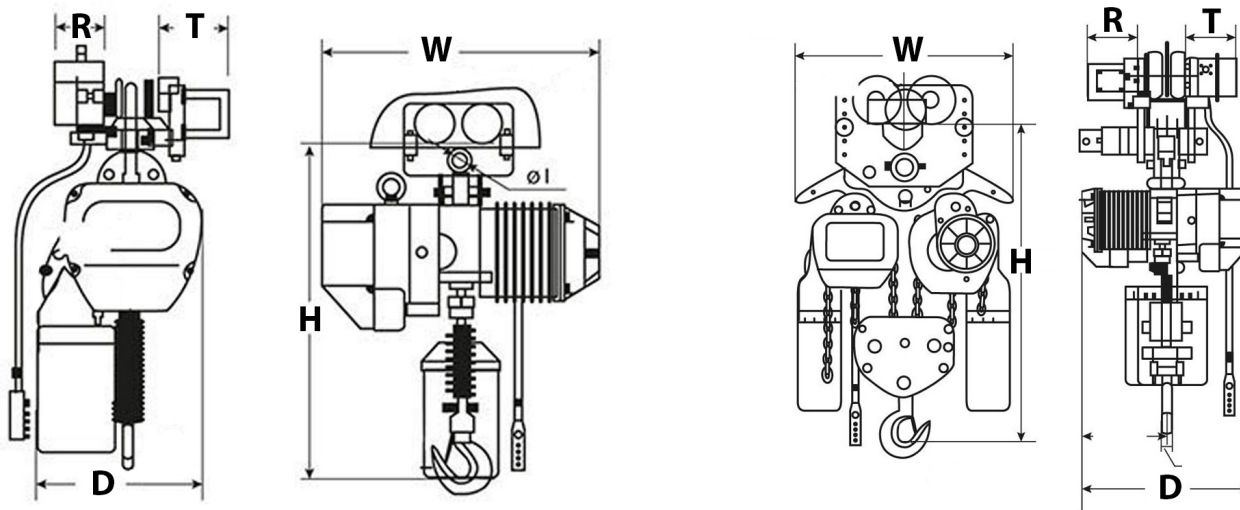

## Unit Weight & Dimensions

<b>T Trolley Motor Width</b>	6.14 in / 156 mm
<b>D Depth</b>	18 in / 450 mm
<b>R Trolley Cover Width</b>	10 in 246 mm
<b>W Width</b>	30 in / 745 mm
<b>H Minimum Headroom</b>	26 in / 650 mm
<b>J Hook Opening</b>	1.9 in / 48 mm